
blachere®
illumination

Manifesto

We think that illuminations bring light to much more than urban areas and living spaces:
We believe in their power to amaze, enlighten and tell beautiful stories. The way we create and innovate takes into account each expectation and every little detail.

We are committed to product quality and to protecting the environment and humanity. Goodwill and an ethical approach are at the heart of our culture and can be found in all our projects worldwide.

We are Blachère and we have been producing illuminations for 45 years with care and passion.

Not a contract document.
The sizes and wattages of motifs may be subject to change for technical reasons.
All our products are CE marked meaning that they meet electrical security norms and electromagnetic requirements. All our motifs, designs and graphics are protected by the INPI, the OMPI and current industrial and intellectual property laws. Reproduction of any kind, in full or part, is strictly forbidden without written authorisation of blachere illumination s.a.s.

What drives us

In 1973, Jean-Paul Blachère invented a new profession and a signature style all of his own by lighting up living spaces, towns and cities.

We now have over 400 people worldwide working to transform the routine. Across towns, villages, capital cities, shopping centres, parks and monuments, our projects reflect our creativity and ability to invent decorations with increasingly innovative solutions.

While we aim to create beautiful pieces around the world, being eco-friendly is one of our priorities. Although half our research & development budget goes into new organic materials, we are at the very beginning of our eco-friendly journey and doing everything we can to limit the impact of our products and protect the planet.





Our network

Blachère lights up the world with its 26 subsidiaries.
Each country has its own traditions and culture. We know every location inside out and respect what makes it tick, meaning we can offer the most beautiful and, above all, appropriate solutions. Because hopes and challenges vary between countries like Mexico, Sweden and Germany, we provide the best team for every challenge from client brief to installation.

Whether decorating historic monuments, illuminating streets or transforming majestic fountains in Paris, Limoges or Moscow, we aim to pay tribute to the location while respecting its history.

65% of french municipalities illuminated

15 of the 20 largest cities

1000 cities worldwide

500 shopping centres decorated worldwide

Sustainability

Our commitment to protect the planet isn't just something we talk about, it's been in our DNA for over 10 years.
So, it was only natural that we take the same eco-friendly approach for our clients when creating new solutions for them. Having been the first to make LEDs the norm, we are now revolutionising our illuminations' structural design thanks to our BIOPRINT invention. With BIOPRINT — a recyclable and biodegradable material that comes from sugar cane — we can remove over 80% of the aluminium from our 2D decorations (more info p.14 to 17).

We also have our NORDIKA tree which looks just like a real Christmas tree but avoids deforestation (see p.88 to 91) and ORCHESTRA: the app that allows for smart, optimised illumination and electricity management (see p.208 to 211).

Common sense and compassion also underpin how we behave as a business as we aim to significantly and sustainably reduce our carbon footprint:
We are taking action in this area including making our communication tools paperless wherever possible, recycling our waste, generating green energy at our wind farm, installing solar panels and replacing our fleet with hybrid vehicles.

We are also involved in the process of obtaining ISO 14001 certification.





Interactivity

Amaze, surprise, move...as well as illuminations, we develop solutions to make our decorations increasingly lively and interactive. We do all we can so visitors can really get involved, such as enabling them to change decoration colours and integrating augmented reality for unforgettable photos.

We have developed a range of interactive products and mobile apps to use in towns, cities or shopping centres to have fun, make an impression and leave the public wanting to extend their visit and return. Interactivity is even more attractive than illuminations. It brings generations together to share a unique experience. The public stop being onlookers and become involved.

Expertise

We are very fond of our beautiful local region: Provence. Our "haute couture" workshops are in Apt. 60 staff usually work here, but this number rises to over 120 in our peak season. Each year, over 6,000 bespoke decorations are created: giant trees over 25 metres tall, imposing fountains, and multicoloured tunnels 100 metres long. We look after everything from metalwork to the most complex cabling.
In total, 50,000 standard decorations are made annually at our production sites.

Because imagination has no limit and know-how is our specialty, do not hesitate to contact us to create special lighting decorations totally personalized :
Walkthrough tree, huge size, custom design, multi-coloured animation, the possibilities are endless!

An international team of over 30 designers create our decorations: everything from cross-street to spectacular frontages for major stores and fun characters. We start each project with a clean slate and create motifs and designs to suit our clients' wishes.
Over half the decorations in this catalogue are updated each year in line with the latest trends and influences from around the world.

The French government have also awarded us EPV certification: a distinction given to French companies that showcase artisanal and industrial expertise and export abroad.

We are the only French illuminations company to have obtained ISO 9001 certification.


Trondheim Torg
God Jul
clas ohlson
9-20 (18)
TrondheimTorg
9-20 (18)


JNBJSKA
Seppälä
ANTTILA
ESPRIT
stadium
CLAS OHLSON
MANG




GLASMAGASINET
GLASMAGASINET


APOTEK




CHRISTIANIA B
ING






MUJI
MANGO



Bioprint

The first recyclable and biodegradable structures

Having been the first company to take LEDs mainstream, we are now revolutionising the design of our illumination structures with our Bioprint invention: an innovative biodegradable material. These decorations are then recycled, like our garlands and electrical components.
Bioprint comes from biosourced and GMO-free sugar cane, which is then turned into dehydrated bioethanol at a French laboratory.
When the granules arrive at our workshops in Apt, France, they are dyed with our own colours and the material is then injected into our 3D printers which produce colourful, biodegradable and recyclable structures.
A process that generates no waste at the manufacturing stage and allows total recyclability of the motif at the end of its life, thanks to the grinding of the frame in a form of granules.

This new material allows us to remove more than 80% of aluminium on our 2D motifs, which has a considerable impact on our carbon footprint. Indeed, the bioprint manufacturing process emits 10 times less CO2 than aluminium.

As well as being eco-friendly, this innovation means we can design highly creative and colourful structures that are just as stunning at night as they are during the day and do not leave any trace on the natural environment.

RECYCLABLE & BIODEGRADABLE

ORGANICALLY SOURCED

CERTIFIED AS GMO-FREE

IK10 UV

RESISTANCE



Biodegradability

Biodegradation is the breakdown of organic matter by microorganisms.

Substances are said to be biodegradable if external living organisms can cause them to decompose into separate elements without harming the natural environment.
Our decorations biodegrade slowly, meaning they can be installed outdoors for long periods without this causing aesthetic or mechanical damage. One advantage of this slowness is that it minimises the greenhouse gases generated when the complex molecules that make up our revolutionary material biodegrade.
While industrial composting is one way to sensibly manage this biomass the eco-friendliest approach is to recycle the material. By doing this, daily waste production can be minimised.



BIOPRINT granule decomposition stages.

RECYCLABLE & BIODEGRADABLE BIOPRINT STRUCTURE

The entire structure onto which the lighting components are wired is made using **our revolutionary new Bioprint material available in different colours.**



RECYCLED ALUMINIUM FRAME

This sleek aluminium frame is used to maintain the **Bioprint** structure. After use, the aluminium in all our decorations is **collected and processed by an accredited organization.**

RECYCLED ELECTRIC COMPONENTS

All the garlands and other electric components we use in our decorations are **collected and recycled by ESR-Récylum** which is approved to process waste electrical and electronic equipment from commercial sources.







1

Green range

36 – 55

2

Frozen range

56 – 61

3

Ribbon & sphere

62 – 69

4

3D Characters & animals

70 – 77

5

Arches & trees

78 – 95

6

Garlands & accessories

96 – 195



range

Green

This sweet and gentle collection combines tradition and a sense of poetry to warm up Christmas with its warm white and green hues. Arabesques, bows and delicate ropes light up the streets of towns and cities to provide a romantic feel.

Nordika

The christmas tree better than a real one!

Who hasn't dreamed of a huge Christmas tree? However, a natural tree takes 30 or 40 years to reach a height of 12 m. To avoid being involved in deforestation and cutting down these majestic four-decades-old trees, we have invented Nordika.
Pre-illuminated with a SlowGlow effect, and easy to put up and store away, they are perfect replicas of their natural cousins thanks to their design and incredibly realistic look.



OPTIONAL TREETOP



HYPER REALISTIC CHRISTMAS TREE BRANCHES



WOOD-EFFECT TRUNK




WOOD EFFECT STAND AVAILABLE

The Christmas tradition

What could be more iconic than a majestic Christmas tree during the holiday season?
This Christmas, Blachère has reinvented this festive classic, taking care of every little detail:
The perfectly regular branches, realistic high-quality finish and majestic size make this a must-have product.

Just as you carefully consider how you will decorate your Christmas tree at home each year to surprise and amaze your family and friends, you can personalise your Nordika to make it unique: hang baubles from the branches, add lit toppers, or put them in a wooden stand.

Our NORDIKA tree remains a lasting, high-quality investment in line with the very best of Christmas tradition.

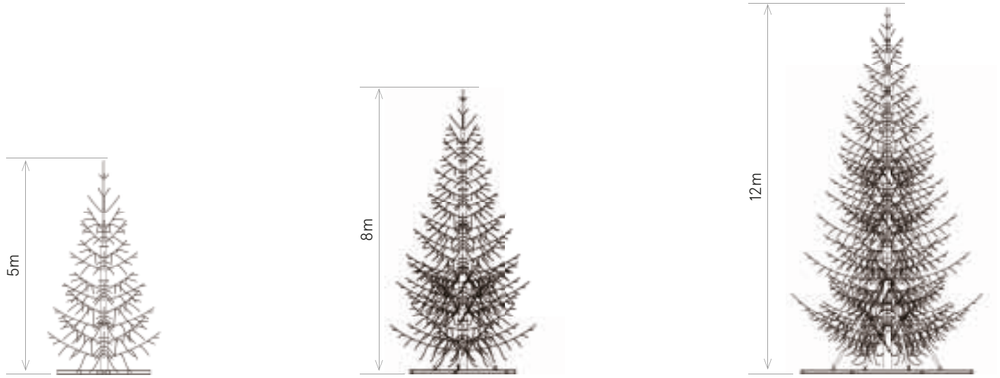

Ref	Height	ø	P(W)	Weight	No of elements	Colour of Led	No of Led
GX081LW	5,00 m	3,56 m	235 W	257 kg	42		2712 (678 static + 2034 with slowglow effect)
GX082LW	8,00 m	4,70 m	770 W	1 112 kg	107		8664 (2166 static + 6498 with slowglow effect)
GX083LW	12,00 m	5,90 m	1870 W	2 750 kg	194		21024 (5256 static + 15768 with slowglow effect)





TL341W
◆ 1,50m - ◆ 6,00m
ϟ 110W - ☒ 28,0kg



ITL114W
◆ 0,90m - ◆ 4,00m
ϟ 130W - ☒ 18,6kg




ITL113W
◆ 0,70m - ◆ 4,00m
ϟ 132W - ☒ 25,0kg



PL034W-S
◆ 2,50m - ◆ 1,42m
ϟ 55W - ☒ 20,7kg



IPL114W
◆ 2,00m - ◆ 0,90m
ϟ 65W - ☒ 9,3kg

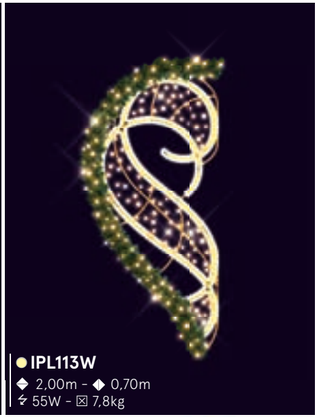

IPL113W
◆ 2,00m - ◆ 0,70m
ϟ 55W - ☒ 7,8kg




PL313W +
◆ 2,00m - ◆ 1,00m
ϟ 20W - ☒ 10,8kg

TGL70LWW
◆ 0,60m - Ø 0,60m
ϟ 30W - ☒ 4,0kg



PL312W
◆ 1,60m - ◆ 0,90m
ϟ 53W - ☒ 12,0kg

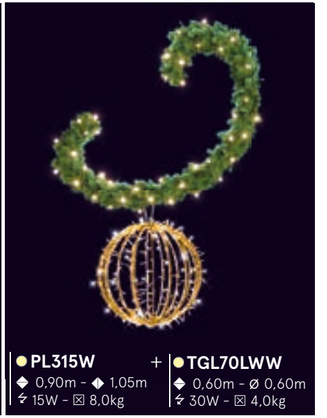

PL315W +
◆ 0,90m - ◆ 1,05m
ϟ 15W - ☒ 8,0kg

TGL70LWW
◆ 0,60m - Ø 0,60m
ϟ 30W - ☒ 4,0kg

PL313W, PL315W: Optional sphere. Customise your decorations with the suspension options on pages 41, 43, 45, 47 and 67.

Detailed technical information p196




GX117LW
◆ 2,00m - ◆ 1,50m - ◪ 1,50m
ϟ 126W - ☒ 33kg




GX048LW
◆ 0,73m - ◆ 0,48m - ◪ 0,48m
ϟ 40W - ☒ 4,3kg



GX116LW
◆ 0,70m - ◆ 0,60m
ϟ 15W - ☒ 2,8kg

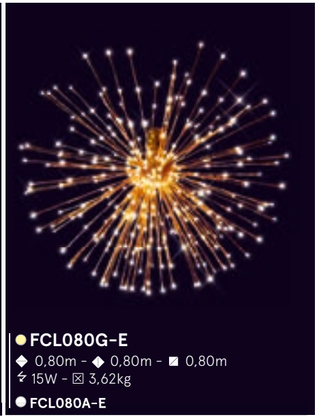

FCL080G-E
◆ 0,80m - ◆ 0,80m - ◪ 0,80m
ϟ 15W - ☒ 3,62kg
FCL080A-E

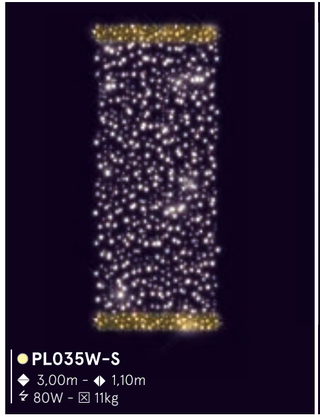

PL035W-S
◆ 3,00m - ◆ 1,10m
ϟ 80W - ☒ 11kg



PL036W-S
◆ 1,30m - ◆ 1,30m
ϟ 122W - ☒ 17kg



PL037W-S
◆ 0,90m - ◆ 1,48m
ϟ 106W - ☒ 9kg

Customise your decorations with the suspension options on pages 41, 43, 45, 47 and 67.

Detailed technical information p196

Composition ideas




2 x GP134L-W
+
1 x TL169R

3 x TSL2W
+
2 x TL195W-S
+
1 x TL196W-S

2 x GP303
+
1 x TGL150W-S

2 x GP139L-W
+
1 x TL199W-S

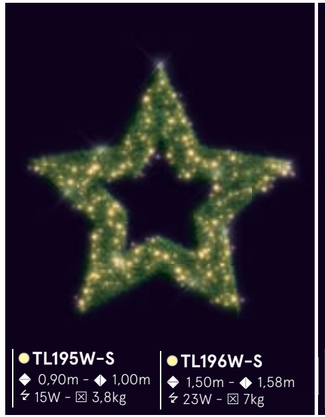


TL195W-S
◆ 0,90m - ◆ 1,00m
ϟ 15W - ☒ 3,8kg

TL196W-S
◆ 1,50m - ◆ 1,58m
ϟ 23W - ☒ 7kg



TL153W
◆ 1,50m - ◆ 1,58m
ϟ 33W - ☒ 9kg

TL154W
◆ 0,90m - ◆ 0,97m
ϟ 11W - ☒ 5kg

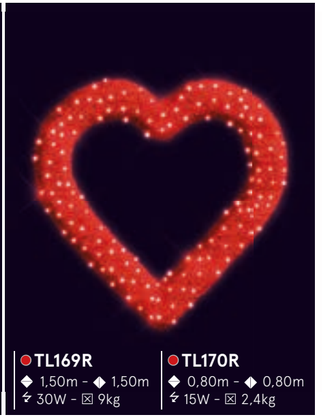

TL169R
◆ 1,50m - ◆ 1,50m
ϟ 30W - ☒ 9kg


TL170R
◆ 0,80m - ◆ 0,80m
ϟ 15W - ☒ 2,4kg



TL175W-S
◆ 1,50m - ◆ 1,50m
ϟ 45W - ☒ 18,2kg



TL199W-S
◆ 1,10m - ◆ 0,63m
ϟ 8W - ☒ 7kg

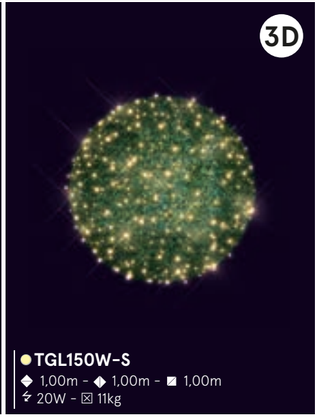

TGL150W-S
◆ 1,00m - ◆ 1,00m - ◪ 1,00m
ϟ 20W - ☒ 11kg

Customise your decorations with the suspension options on pages 41, 43, 45, 47 and 67.

Detailed technical information p196

Composition ideas



2 x GP139L-W (page XXX)
+
1 x GX048LW



2 x GP303W (page XXX)
+
1 x ITL023W-S (page XXX)



3 TSL2W (page XXX)
+
1 x ITL065W-S
(page XX)




1 x FL390WBF
(page XX)
+
1 x ITL081W-S
(page XX)



ITL066W-S
◆ 1,00m - ◆ 0,70m
ϟ 10W - ☒ 4kg



ITL023W-S
◆ 1,00m - ◆ 1,00m
ϟ 12W - ☒ 4kg



ITL065W-S
◆ 1,00m - ◆ 0,76m
ϟ 20W - ☒ 5kg



ITL024W-S
◆ 1,00m - ◆ 1,00m
ϟ 12W - ☒ 4kg



ITL025W-S
◆ 1,00m - ◆ 1,00m
ϟ 10W - ☒ 2kg



ITL067W-S
◆ 1,00m - ◆ 0,71m
ϟ 10W - ☒ 4kg



ITL081W-S
◆ 1,00m - ◆ 0,85m
ϟ 4W - ☒ 2kg



ITL084W
◆ 0,85m - ◆ 0,70m
ϟ 47W - ☒ 5kg

Customise your decorations with the suspension options on pages 41, 43, 45, 47 and 67.

Detailed technical information p196



SV1200W-S
◆ 12,00m - ◆ 6,00m - ◪ 6,00m
ϟ 389W - ☒ 1479,0kg



SV300LW
◆ 3,00m - ◆ 1,30m - ◪ 1,30m
ϟ 29W - ☒ 50,0kg

GX057LW
◆ 2,50m - ◆ 1,60m - ◪ 1,60m
ϟ 40W - ☒ 53,0kg

GX058LW
◆ 2,10m - ◆ 0,48m - ◪ 0,24m
ϟ 15W - ☒ 31kg

GX059LW
◆ 3,00m - ◆ 0,80m - ◪ 0,40m
ϟ 24W - ☒ 32kg

SV300LW, GX057LW: Passive balls not included - study on demand.

Detailed technical information p228 to 236



● **SND022**
◆ 8,00m - ◆ 2,70m - ◪ 2,70m
ϟ 474W - ☒ 215,0kg



3,00m
● **SLED05 – ● SLED04**
◆ 3,00m - ◆ 1,17m - ◪ 1,17m
ϟ 100W - ☒ 85,0kg
5,00m : ● **SV500-L**
10,00m : ● **SV1000-L**

● **GP157W**
◆ 2,10m - ◆ 1,35m - ◪ 1,35m
ϟ 40W - ☒ 18,0kg

● **GSV140B + FML180**
◆ 1,40m - ◆ 0,60m - ◪ 0,60m
ϟ 40W - ☒ 15,0kg
● **GSV140 + FML180W**

Detailed technical information p228 to 236






Detailed technical information p228 to 236



range

Frozen

The north wind blows its frosty air and star-shaped snowflakes fall in their thousands. You can find all the magic of these gorgeous snow crystals in our decorations which create a magical polar atmosphere in white, gold and blue tones.

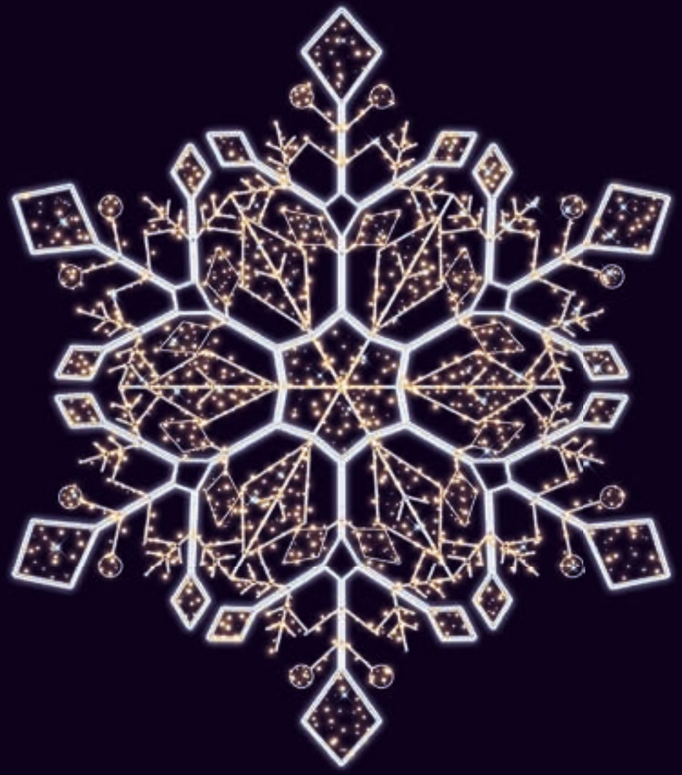


ITL016W
◆ 3,10m - ◆ 3,10m
ϟ 200W - ☒ 25,0kg
ITL016



ITL017
◆ 2,02m - ◆ 2,02m
ϟ 135W - ☒ 16,0kg



ITL021
◆ 1,25m - ◆ 1,25m
ϟ 55W - ☒ 5,2kg




ITL022W
◆ 0,97m - ◆ 0,85m
ϟ 30W - ☒ 3,2kg
ITL022



ITL115
◆ 0,50m - ◆ 0,50m
ϟ 55W - ☒ 5,2kg



ITL019
◆ 2,00m - ◆ 2,00m
ϟ 95W - ☒ 13,2kg



ITL020W
◆ 0,97m - ◆ 0,85m
ϟ 40W - ☒ 4,2kg
ITL020B



ITL046
◆ 0,82m - ◆ 0,70m
ϟ 30W - ☒ 3,4kg



ITL115W
◆ 0,50m - ◆ 0,50m
ϟ 55W - ☒ 5,2kg

Detailed technical information p196



TL241WG-S
◆ 1,50m - ◆ 6,00m
ϟ 90W - ☒ 23,0kg



ITL096W
◆ 1,00m - ◆ 3,00m
ϟ 139W - ☒ 21,0kg
ITL096

3D




TGL141W-S
◆ 2,00m - ◆ 2,00m - ◪ 0,50m
ϟ 100 W - ☒ 20kg

3D




TGL142W-S
◆ 1,00m - ◆ 1,00m - ◪ 0,25m
ϟ 30W - ☒ 9kg

3D

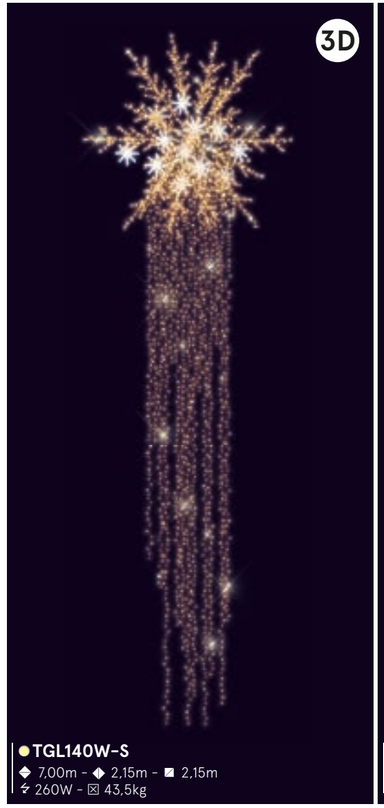


TGL140W-S
◆ 7,00m - ◆ 2,15m - ◪ 2,15m
ϟ 260W - ☒ 43,5kg

3D

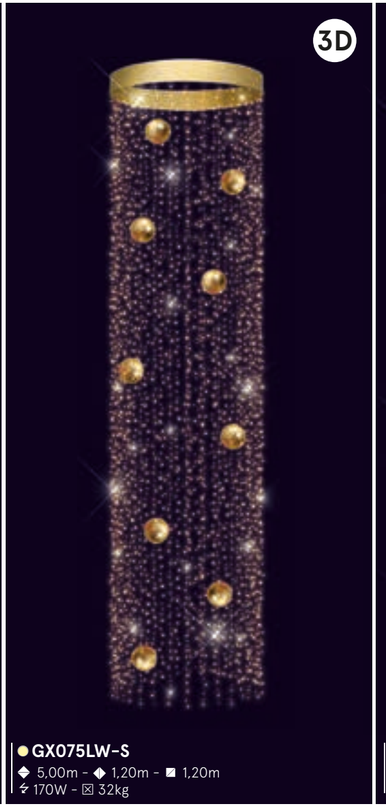

GX075LW-S
◆ 5,00m - ◆ 1,20m - ◪ 1,20m
ϟ 170W - ☒ 32kg

3D

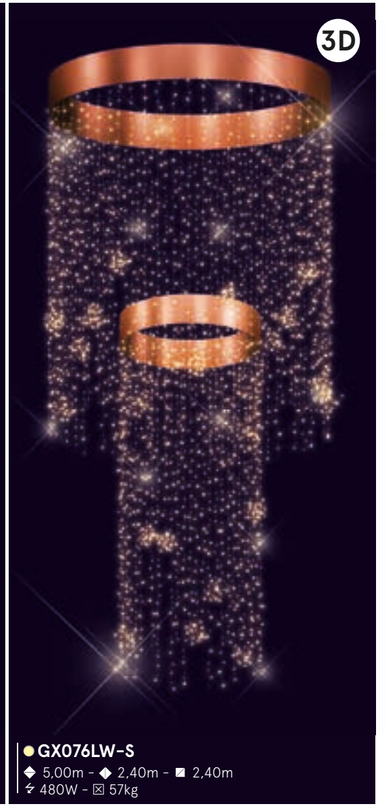

GX076LW-S
◆ 5,00m - ◆ 2,40m - ◪ 2,40m
ϟ 480W - ☒ 57kg

Detailed technical information p194 to 197



range

Ribbon & sphere

Shooting stars, baubles, gifts... This decidedly joyful and colourful collection will provide an imaginative Christmassy touch, decorating streets, building frontages and landmarks to create a brightly lit panorama that is dazzling and magical.



ITL099W
◆ 0,70m - ◆ 4,60m
ϟ 113W - ☒ 23,0kg



ITL044W-S
◆ 1,42m - ◆ 4,65m
ϟ 115W - ☒ 19,6kg



ITL027W-S
◆ 1,00m - ◆ 0,67m
ϟ 30W - ☒ 3,2kg



IPL039W-S
◆ 2,00m - ◆ 0,72m
ϟ 35W - ☒ 6,2kg



ITL062W-S
◆ 1,50m - ◆ 5,00m
ϟ 116W - ☒ 22,0kg




ITL064W-S
◆ 1,00m - ◆ 3,50m
ϟ 114W - ☒ 23,0kg



ITL063W-S
◆ 1,20m - ◆ 6,00m
ϟ 210W - ☒ 37,0kg



ITL116W
◆ 1,18m - ◆ 6,00m
ϟ 168W - ☒ 27,0kg

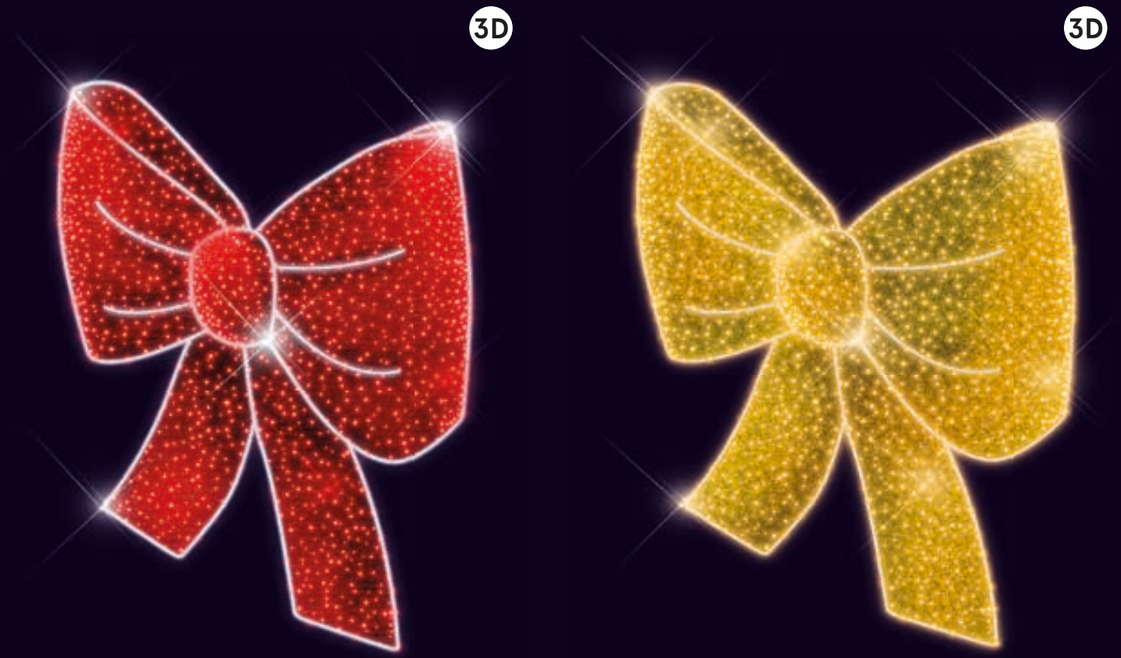


ML018R-S
◆ 4,00m - ◆ 3,37m - ■ 0,66m
ϟ 440W - ☒ 183kg
ML018RW-S
ML018W-S



ML016R-S
◆ 2,00m - ◆ 2,00m
ϟ 170W - ☒ 20,0kg



ML015R-S
◆ 1,00m - ◆ 1,00m
ϟ 80W - ☒ 10,0kg

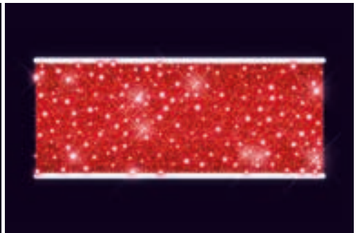


ML017R-S
◆ 0,80m - ◆ 2,00m
ϟ 66W - ☒ 11,0kg



ML016RW-S
◆ 2,00m - ◆ 2,00m
ϟ 170W - ☒ 20,0kg



ML015RW-S
◆ 1,00m - ◆ 1,00m
ϟ 80W - ☒ 10,0kg

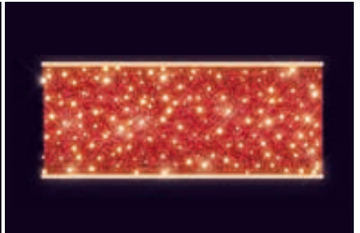


ML017RW-S
◆ 0,80m - ◆ 2,00m
ϟ 66W - ☒ 11,0kg



ML016W-S
◆ 2,00m - ◆ 2,00m
ϟ 170W - ☒ 20,0kg




ML015W-S
◆ 1,00m - ◆ 1,00m
ϟ 80W - ☒ 10kg

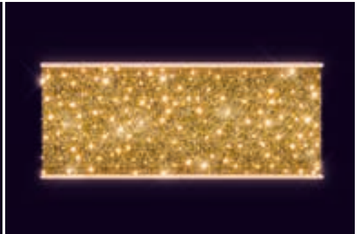

ML017W-S
◆ 0,80m - ◆ 2,00m
ϟ 66W - ☒ 11kg

Detailed technical information p194 to 203

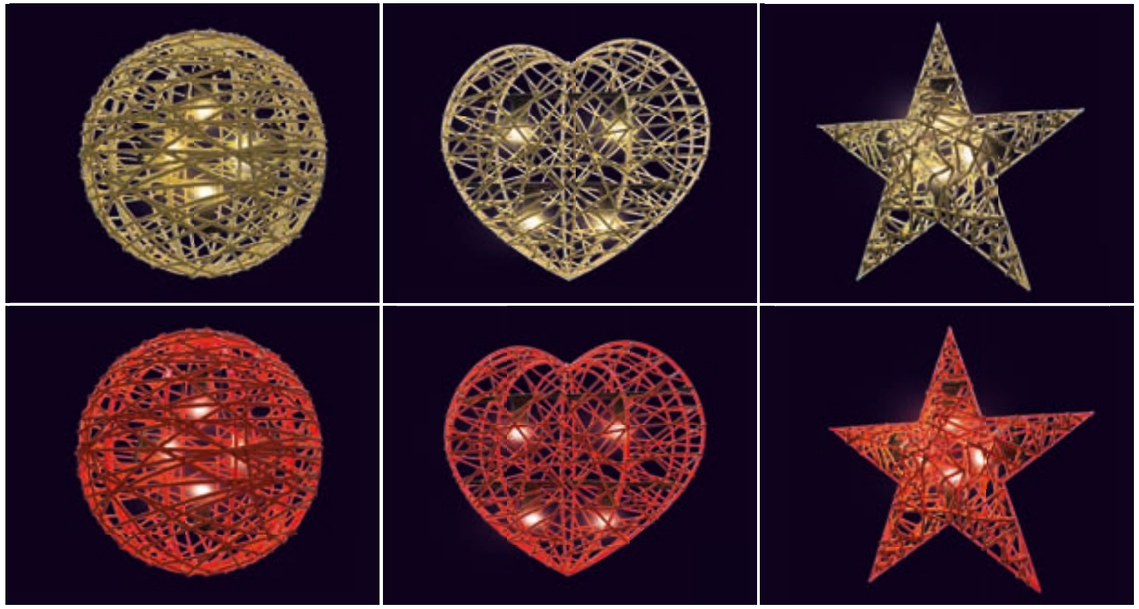

ø 0,30m

TGL001W

◆ 0,30m - ◆ 0,30m - ◪ 0,30m

ϟ 5W - ☒ 1,8kg

TGL001R

ø 0,60m

TGL002W

◆ 0,60m - ◆ 0,60m - ◪ 0,60m

ϟ 20W - ☒ 5,0kg

TGL002R

ø 1,00m

TGL003W

◆ 1,00m - ◆1,00m - ◪1,00m

ϟ 30W - ☒ 10,4kg

TGL003R

ø 0,30m

TGL004W

◆ 0,30m - ◆ 0,30m - ◪ 0,30m

ϟ 5W - ☒ 1,4kg

TGL004R

ø 0,60m

TGL005W

◆ 0,60m - ◆ 0,60m - ◪ 0,60m

ϟ 6W - ☒ 4,2kg

TGL005R

ø 1,00m

TGL006W

◆ 1,00m - ◆1,00m - ◪1,00m

ϟ 8W - ☒ 18,0kg

TGL006R

ø 0,30m

TGL007W

◆ 0,30m - ◆ 0,30m - ◪ 0,30m

ϟ 5W - ☒ 1,6kg

TGL007R

ø 0,60m

TGL008W

◆ 0,60m - ◆ 0,60m - ◪ 0,60m

ϟ 6W - ☒ 13,0kg

TGL008R

ø 1,00m

TGL009W

◆ 1,00m - ◆1,00m - ◪1,00m

ϟ 30W - ☒ 5,2kg

TGL009R



ø 0,60m

TGL70LW

◆ 0,60m - ◆ 0,60m - ◪ 0,60m

ϟ 30W - ☒ 4,0kg

TGL70LWW

ø 1,00m

TGL71LW

◆ 1,00m - ◆ 1,00m - ◪ 1,00m

ϟ 75W - ☒ 10,9kg

TGL71LWW

ø 1,60m

TGL72LW

◆ 1,60m - ◆ 1,60m - ◪ 1,60m

ϟ 165W - ☒ 24,8kg

TGL72LWW

Detailed technical information p196



3D Characters & animals

Each year, we design 3D characters to create exciting, fun and joyful decorations.
From a funny bear to a majestic deer or a giant Father Christmas, all our creations make a wonderful spectacle for all ages. They are mostly interactive and animated (ending in -A references).

GX194L
Traîneau gold
◆ 1,20m - ◆ 2,30m - ◪ 1,20m
ϟ 79W - ☒ 82,0kg

GX092L
Cute Renoo
◆ 2,20m - ◆ 1,15m - ◪ 0,70m
ϟ 22W - ☒ 30,0kg

GX093L
Renoo bondissant
◆ 2,00m - ◆ 1,20m - ◪ 0,60m
ϟ 22W - ☒ 22,0kg

GX042L
Pole
◆ 2,20m - ◆ 1,20m - ◪ 0,80m
ϟ 18W - ☒ 39,0kg

GX132L
Xmas Santa
◆ 3,60m - ◆ 2,60m - ◪ 1,90m
ϟ 101W - ☒ 96,0kg

GX104L-S
Ange
◆ 2,15m - ◆ 0,96m - ◪ 0,85m
ϟ 62W - ☒ 30,0kg



GX097L
Peter
◆ 2,00m - ◆ 1,30m - ◪ 0,60m
ϟ 24W - ☒ 31,0kg

GX130L
Boîte aux lettres
◆ 1,85m - ◆ 1,00m - ◪ 1,00m
ϟ 91W - ☒ 38,0kg

GX098L
John
◆ 2,30m - ◆ 1,50m - ◪ 0,90m
ϟ 38W - ☒ 58,0kg

H : 2m
GX087L
Little Teddy chic
◆ 2,00m - ◆ 2,00m - ◪ 1,45m
ϟ 75W - ☒ 87,0kg

H : 4m
GX086L-A
Teddy chic
◆ 4,00m - ◆ 2,70m - ◪ 2,50m
ϟ 226W - ☒ 259,0kg
with presence detector

H : 4m
GX086L
Teddy chic
◆ 4,00m - ◆ 2,70m - ◪ 2,50m
ϟ 226W - ☒ 259,0kg

GX039L
Cheminée
◆ 2,20m - ◆ 2,40m - ◪ 0,70m
ϟ 95W - ☒ 56,0kg

GX212LW-S
Ball seat
◆ 1,50m - ◆ 1,50m - ◪ 1,50m
ϟ 24W - ☒ 37,0kg



GX139LW-S
Mama Ours
◆ 1,90m - ◆ 2,66m - ◪ 1,20m
ϟ 77W - ☒ 58,0kg

GX137LW-S
Wolf
◆ 3,00m - ◆ 3,09m - ◪ 0,90m
ϟ 68W - ☒ 60,0kg

GX140LW-S
Papa Ours
◆ 2,40m - ◆ 3,60m - ◪ 1,50m
ϟ 24W - ☒ 31,0kg

GX135LW-S
Swan
◆ 1,50m - ◆ 1,16m - ◪ 1,00m
ϟ 29W - ☒ 25,0kg

GX136LW-S
Caribou
◆ 4,00m - ◆ 4,60m - ◪ 3,66m
ϟ 116W - ☒ 97,0kg

GX138LW-S
Reindeer
◆ 4,00m - ◆ 3,00m - ◪ 2,00m
ϟ 96W - ☒ 88,0kg

GX141LW-S
Baby Bambi
◆ 1,90m - ◆ 1,80m - ◪ 0,65m
ϟ 40W - ☒ 29,0kg

GX142LW-S
Bambi
◆ 2,30m - ◆ 2,10m - ◪ 0,76m
ϟ 58W - ☒ 38,0kg



Arches & trees

Although our audience is hugely diverse, young and old alike are looking for unforgettable experiences and walkthrough our elegant arches, bright trees and our fountains, streets and alleyways are given a welcoming and natural feel.



GX070LR-S
◆ 3,90m - ◆ 3,60m - ◪ 3,30m
ϟ 260W - ☒ 235,0kg



SL030R
◆ 4,00m - ◆ 6,20m - ◪ 0,70m
ϟ 144W - ☒ 102,0kg

TGL177W-S
◆ 5,00m - ◆ 5,00m - ◪ 5,00m
ϟ 1024W - ☒ 201,0kg



GX016LW-S
◆ 3,52m - ◆ 5,00m - ◪ 5,00m
ϟ 515W - ☒ 150,0kg

GP-TRONE1
◆ 1,90m - ◆ 0,92m - ◪ 0,84m



SL019W-S
◆ 2,75m - ◆ 3,00m - ◪ 2,24m
ϟ 200W - ☒ 190,0kg

GX213LW-S
◆ 5,00m - ◆ 5,00m - ◪ 5,00m
ϟ 240W - ☒ 457,0 kg



SLED010W
◆ 7,50m - ◆ 3,40m - ◪ 3,40m
ϟ 265W - ☒ 152,0kg



GX060L-W
◆ 5,00m - ◆ 2,40m - ◪ 2,40m
ϟ 360W - ☒ 199,0kg
GX060L

GX202LW-S
◆ 4,00m - ◆ 1,60m - ◪ 1,60m
ϟ 148W - ☒ 35,0kg

SND02
◆ 5,00m - ◆ 2,45m - ◪ 2,45m
ϟ 410W - ☒ 190,0kg



GX001-LW
◆ 5,00m - ◆ 5,00m - ◪ 5,00m
ϟ 315W - ☒ 206,0kg

GX001-L



GX300LW-S
◆ 4,00m - ◆ 4,00m - ◪ 4,00m
ϟ 111W - ☒ 184,0kg

GX863LW-S
◆ 5,75m - ◆ 3,00m - ◪ 3,00m
ϟ 197W - ☒ 210,0kg

SL005W-S
◆ 5,00m - ◆ 3,30m - ◪ 3,30m
ϟ 77W - ☒ 205,0kg



● **SL037W-S**
◆ 2,90m - ◆ 1,10m - ◪ 1,00m
ϟ 45W - ☒ 51,0kg

● **GX327LW**
◆ 1,10m - ◆ 1,00m - ◪ 1,00m
ϟ 25W - ☒ 7,2kg

● **GX327L**

2,00m
● **SL013W - ● SL013**
◆ 2,00m - ◆ 3,50m
ϟ 45W - ☒ 9,0kg

1,30m :
● **SL012W - ● SL012**

2,10m
● **SL033W - ● SL033**
◆ 2,10m - ◆ 2,50m
ϟ 45W - ☒ 8,8kg

1,40m :
● **SL032W - ● SL032**

● **SL035W-S**
◆ 2,00m - ◆ 0,60m - ◪ 2,10m
ϟ 62W - ☒ 46,0kg

● **SL036W-S**
◆ 2,90m - ◆ 1,00m - ◪ 1,00m
ϟ 21W - ☒ 31,0kg



Presence sensors:
an animated lighting display is triggered when the public approaches.

Optional benches: available for all the arches on these pages.

SL034W-S
◆ 3,00m - ◆ 4,30m
ϟ 241W - ☒ 137,0kg



SL017W-S
◆ 4,80m - ◆ 5,15m
ϟ 356W - ☒ 108,0kg

SL016-S
◆ 4,55m - ◆ 4,50m
ϟ 51W - ☒ 130,0kg



Play Magic

Play in augmented reality!

Allowing audiences to do things like take a photo with Father Christmas or play with Charlie the Unicorn, our augmented reality apps add virtual characters into the real world, leaving the public laughing and amazed.
Children and adults can easily take part in the fun using a smartphone enjoying an unforgettable experience that transforms reality into a unique performance.

How does it work?

For the public, the idea is simple: When users approach the PlayMagic banner, the app they have pre-installed on their phones automatically unlocks to give them access to the games.
They can then share the experience on their social media pages. The public app features your branding and a link to your website or social media.

For the city:
The games app has a subscription model valid while the illuminations are up, with games updated each year.
Apart from this, all you need to do is install the banner near the illuminations to tell the public they can enjoy a free game on their phone in the location. There is no need for any connection.
The app's success also depends on you advertising it on displays in your town/city and on your social media pages.
We can assist you in setting up your communications (Réf. ARCOM below).

Games available:



Reference	Description
AR001	3 games pack (chosen from the 7 existing games) + 1 Flag
AR002	5 games pack (chosen from the 7 existing games) + 1 Flag
ARTOT1	1 additional Flag
ARCOM	Augmented Reality Communications Pack (non-printed poster, web banner and smartphone-format image).







Play Colors

Change the colour of the illuminations!

Play Colors is a smartphone application that allows the public to control the colour and the animation of the illuminations in their city or shopping centre during a play session.
Changing the colour of the garlands with just one click, launching comets of light with their fingertips, making the lights pulse to a rhythm like a heartbeat by tapping the screen of their smartphone... these are just some of the games available on this app.
The Selfie mode allows the user to immortalise this experience in front of the illuminations and share the results on social media, so inviting their friends to come and try it themselves.

How does it work?

For the public, the principle is very simple: The user downloads the app to their smartphone and goes to the location of the illuminations. They choose their play area and start a session. They can then share their gaming experience or selfie on social media.

For the city: The city decks trees or covers the facades of buildings with RGB garlands and control boxes (see refs below). The Play Colors app is tailor-made for our customers by our Blachère R & D teams. Together with you, we identify the different play areas in the city or the shopping centre and develop a fully personalised smartphone app with the logo of your choice.

The success of this app depends on your own communications via urban signage or posts on your social networks promoting the interactive game for both children and adults, as widely as possible.

We can assist you in setting up your communications.








Equipment	Description	Additional information
FL525RGB	RGB garlands (p132-133)	Custom project: Please contact us before placing any order (find your contacts on p238 to 240)
PRX10RGB	Control Box (p132-133)	
PLAY COLORS	Smartphone Application	




Garlands

Blachère LEDs

led+



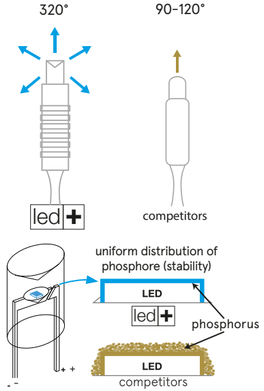


By considering practical use in their innovative designs, our R&D department have devised the all-new LED+ in both static and slowflash editions to make your projects come alive! Our new and exclusive LED range is the outcome of a long-term collaboration with Nichia®, the world leader in LEDs. The range is:

+ bright, + robust, + long lasting, + consistent in terms of color

The new technical features of LED+:
- ▶ **Design is optimised and registered**
to promote the luminous efficiency of our product (inverted cone principe).
- ▶ **Thermal dissipation is maximised**
for longer LED life
- ▶ **Uniform phosphorus deposition**
for a uniform lighting effect.
- ▶ **2 years guarantee**
- ▶ **Optimum protection index: IP66 / IP69**
- ▶ **Octoplus 230V Connection System by Blachère IP67**

led *Classic*





Our standard LED model!

Bright and stable (lifespan and colour), our Classic LEDs also have inverted cones (for even light distribution).


Production is closely monitored to make sure the quality is optimum and competitive on the market.
230V model: IP66
24V model: IP55



Sparklight® Led+ garlands with slowflash

rubber · IP66/IP69 · IK06 · 230V

requires 230V power supply cable L: 1,50m FY08+ type...
and bridge rectifier FY043+ type... see page 216 to 218



	LED	SLOWFLASH	P (W)		□	■
20,00 m	108 ○	52 ○	11,5	100m	**FL590BF+**	**FL590F+**
20,00 m	108 ○	52 ○	11,5	100m	**FL590WBF+**	**FL590WF+**
20,00 m	108 ○	52 ○	11,5	100m		**FL590BLF+**
20,00 m	108 ○	52 ○	11,5	100m		**FL590RF+**
1,50m	230V power supply cable		690W max - see p182 to 184		**FY08-B+**	**FY08+**
0,30m	bridge rectifier		690W max - see p182 to 184		**FY043A-B+**	**FY043A+**
0,20m	bridge rectifier		230W max - see p182 to 184		**FY041A-B+**	**FY041A+**

product info

Blachère exclusive
- Protected model
- High brightness
- Shock resistant IK06
- Long lifespan
- Even hue
- IP 66/69 protection rating. Maximum rating allowed for a 230V product.
- Flexible connectivity thanks to the extensive Octoplus 230V by Blachère range (see p.182 to 184)


2 YEARS GUARANTEE
conditions : contact us



Sparklight® Led+ garlands static



requires 230V power supply cable L: 1,50m FY08+ type...
and bridge rectifier FY043+ type... see page 216 to 218



	LED	P (W)			
20,00 m	160 ○	11,5	100m	**FL590-B+**	**FL590+**
20,00 m	160 ○	11,5	100m	**FL590W-B+**	**FL590W+**
20,00 m	160 ●	11,5	100m		**FL590BL+**
20,00 m	160 ●	11,5	100m		**FL590R+**
1,50m	230V power supply cable	690W max - see p182 to 184		**FY08-B+**	**FY08+**
0,30m	bridge rectifier	690W max - see p182 to 184		**FY043A-B+**	**FY043A+**
0,20m	bridge rectifier	230W max - see p182 to 184		**FY041A-B+**	**FY041A+**

product info

Blachère exclusive
- Protected model
- High brightness
- Shock resistant IK06
- Long lifespan
- Even hue
- IP 66/69 protection rating. Maximum rating allowed for a 230V product.
- Flexible connectivity thanks to the extensive Octoplus 230V by Blachère range (see p.182 to 184)

2 YEARS GUARANTEE


conditions : contact us



Joylight® Led+ curtains with slowflash

rubber · IP66/IP69 · IK06 · 230V

requires 230V power supply cable L: 1,50m FY08+ type...
and bridge rectifier FY043+ type... see page 216 to 218

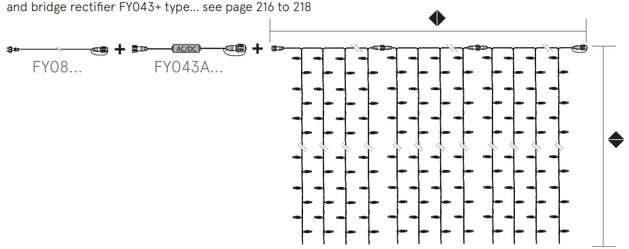

◆	◆	LED	SLOWFLASH	P (W)	⫿⫿	▭	□	■
1,50 m	2,00 m	150 ○	60 ☼	17	15	27	**FL74BF+**	**FL74F+**
1,50 m	2,00 m	150 ●	60 ☼	17	15	27	**FL74WBF+**	**FL74WF+**
3,00 m	2,00 m	240 ○	120 ☼	25	15	18	**FL70BF+**	**FL70F+**
3,00 m	2,00 m	240 ●	120 ☼	25	15	18	**FL70WBF+**	**FL70WF+**
5,00 m	2,00 m	360 ○	180 ☼	65	15	9	**FL75BF+**	**FL75F+**
5,00 m	2,00 m	360 ●	180 ☼	65	15	9	**FL75WBF+**	**FL75WF+**
7,00 m	2,00 m	510 ○	240 ☼	70	15	9	**FL72BF+**	**FL72F+**
7,00 m	2,00 m	510 ●	240 ☼	70	15	9	**FL72WBF+**	**FL72WF+**
10,00 m	2,00 m	690 ○	360 ☼	80	15	8	**FL79BF+**	**FL79F+**
10,00 m	2,00 m	690 ●	360 ☼	80	15	8	**FL79WBF+**	**FL79WF+**
1,50m	230V power supply cable			690W max - see p182 to 184			**FY08-B+**	**FY08+**
0,30m	bridge rectifier			690W max - see p182 to 184			**FY043A-B+**	**FY043A+**
0,20m	bridge rectifier			230W max - see p182 to 184			**FY041A-B+**	**FY041A+**

product info

Blachère exclusive
- Protected model
- High brightness
- Shock resistant IK06
- Long lifespan
- Even hue
- IP 66/69 protection rating. Maximum rating allowed for a 230V product.
- Flexible connectivity thanks to the extensive Octoplus 230V by Blachère range (see p.182 to 184)


2 YEARS GUARANTEE
conditions : contact us



Joylight® Led+ curtains static



requires 230V power supply cable L: 1,50m FY08+ type...
and bridge rectifier FY043+ type... see page 216 to 218

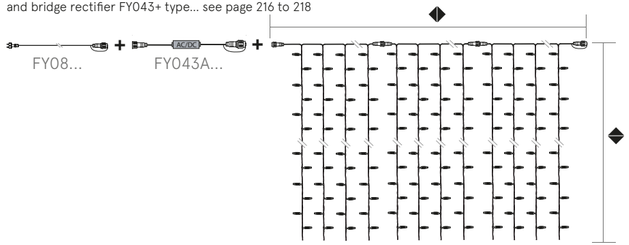

◆	◆	LED	P (W)			□	■
1,50 m	2,00 m	210 ○	20	15	25	**FL74-B+**	**FL74+**
1,50 m	2,00 m	210 ●	20	15	25	**FL74W-B+**	**FL74W+**
3,00 m	2,00 m	360 ○	30	15	16	**FL70-B+**	**FL70+**
3,00 m	2,00 m	360 ●	30	15	16	**FL70W-B+**	**FL70W+**
5,00 m	2,00 m	540 ○	67	15	9	**FL75-B+**	**FL75+**
5,00 m	2,00 m	540 ●	67	15	9	**FL75W-B+**	**FL75W+**
7,00 m	2,00 m	750 ○	69	15	9	**FL72-B+**	**FL72+**
10,00 m	2,00 m	1050 ○	77	15	9	**FL79-B+**	**FL79+**
10,00 m	2,00 m	1050 ○	77	15	9	**FL79-B+**	**FL79+**
10,00 m	2,00 m	1050 ●	77	15	9	**FL79W-B+**	**FL79W+**
1,50m	230V power supply cable		690W max - see p182 to 184			**FY08-B+**	**FY08+**
0,30m	bridge rectifier		690W max - see p182 to 184			**FY043A-B+**	**FY043A+**
0,20m	bridge rectifier		230W max - see p182 to 184			**FY041A-B+**	**FY041A+**

product info

Blachère exclusive
- Protected model
- High brightness
- Shock resistant IK06
- Long lifespan
- Even hue
- IP 66/69 protection rating.
Maximum rating allowed for a 230V product.
- Flexible connectivity thanks to the extensive Octoplus 230V by Blachère range (seep.182 to 184)


2 YEARS GUARANTEE
conditions : contact us



Stalactitlight® Led+ with slowflash or static

rubber · IP66/IP69 · IK06 · 230V

requires 230V power supply cable L: 1,50m FY08+ type... and bridge rectifier FY043+ type... see page 216 to 218



with slowflash

		LED	SLOWFLASH	P (W)			
0,80 m	4,50 m	120	60	16	48	20	**FL390BF+**
0,80 m	4,50 m	120	60	16	48	20	**FL390WBF+**
1,50m	230V power supply cable			690W max - see p216 to 218			**FY08-B+**
0,30m	bridge rectifier			690W max - see p216 to 218			**FY043A-B+**

static

		LED	P (W)			
0,80 m	4,50 m	120	16	48	20	**FL390B+**
0,80 m	4,50 m	120	16	48	20	**FL390WB+**
1,50m	230V power supply cable		690W max - see p182 to 184			**FY08-B+**
0,30m	bridge rectifier		690W max - see p182 to 184			**FY043A-B+**

product info

Blachère exclusive
- Protected model
- High brightness
- Shock resistant IK06
- Long lifespan
- Even hue
- IP 66/69 protection rating. Maximum rating allowed for a 230V product.
- Flexible connectivity thanks to the extensive Octoplus 230V by Blachère range (see p.182 to 184)


2 YEARS GUARANTEE

conditions : contact us



Sparklight® garlands with flash or static



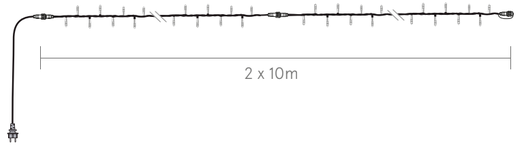

with flash

◆	LED	FLASH	P (W)		□	■
20,00 m	90 ○	30 ☼	8	100m		**512-FX**
20,00 m	90 ●	30 ☼	8	100m		**512W-FX**
20,00 m	150 ○	50 ☼	15,5	100m	**511B-FX**	**511-FX**
20,00 m	150 ●	50 ☼	15,5	100m	**510BW-FX**	**510W-FX**
20,00 m	150 ●	50 ☼	15,5	100m		**510B-FX**
20,00 m	150 ●	50 ☼	15,5	100m		**510R-FX**
20,00 m	150 ●	50 ☼	15,5	100m		**510P-FX**

100% flash

◆	LED	P (W)		□	■
20,00 m	80 ☼	5	100m		**510-FX**

static

◆	LED	P (W)		□	■
20,00 m	200 ○	15	100m	**508-B**	**508**
20,00 m	200 ●	15	100m	**508W-B**	**508W**
20,00 m	200 ●	15	100m		**508B**
20,00 m	120 ○	8	100m		**512C**
20,00 m	120 ●	8	100m		**512CW**

product info


- Past reliability
- Power supply with connecting socket included
- Wide range of Octoplus 230V by Blachère accessories available (see p.216 to 218)
- High flash concentration on FX models
- Increased waterproofing thanks to optimum protection rating.



Sparklight® 24V garlands with flash or static

with PVC cable





with flash


	LED	FLASH	P (W)		
20,00 m	168	28	5	5	**FL502-FX**
20,00 m	168	28	5	5	**FL502**
20,00 m	168	28	5	5	**FL502B-FX**
20,00 m	168	28	5	5	**FL502R-FX**

static

	LED	P (W)		
20,00 m	196	5	5	**501W**

with rubber cable





static


	LED	P (W)		
20,00 m	196	6,2	4	**501CW**
switch-mode power supply 24V dc 25W				**PRTR24V**

product info

- Very low safety voltage ideal for installations that the public can reach
- High protection rating to withstand dirt and moisture
- Long lengths made possible by connecting several garlands using one transformer
- Ref 501CW: more durable rubber cable, ideal for permanent use
- Wide range of Octoplus 24V by Blachère accessories available (see p.182 to 184)





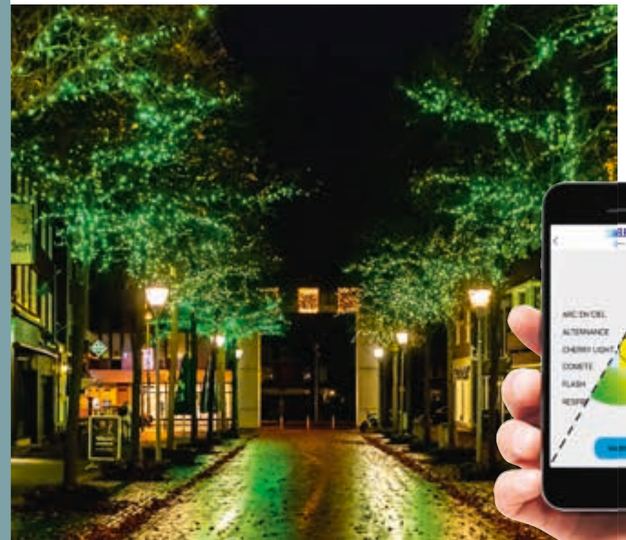




RGB controllable garland Caméléon system





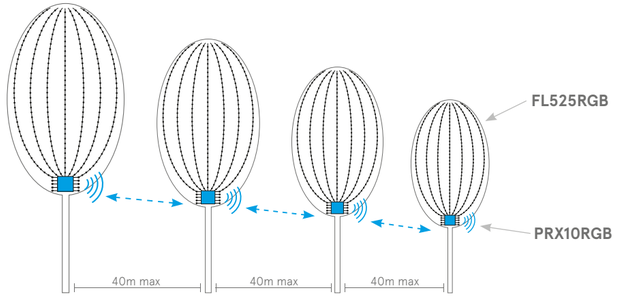

	LED		P (W)			
3,75 m	25 RGB		7,5		2	**FL525RGB**
Caméléon Control box	**No of outputs**	**No of pixels**	**P (W)**	**input voltage**	**output voltage**	
	10	10 x 50 = 500	150	230V	5V	**PRX10RGB**

product info

Customise the colour and animation of your trees,

According to month, week or for a particular event at any time of year.
For a tree of 8 to 10m :
-20 x FL525RGB twigs for 10 radians of 7m (2 x 3,50),
-one PRX10RGB box
-the Cameleon application on you smartphone.

Maximum colour range thanks to RGB LED technology

With the Orchestra system, create lighting scenarios and check how your illuminations are working in real time.




Joylight® curtains with flash or static

rubber · IP66 · incl. · 230V

with flash

◆	◆	LED	FLASH	P (W)			
0,80 m	2,00 m	140	28	14	14	30	**21CBFX**
0,80 m	2,00 m	140	28	14	14	30	**21CWBFX**
1,50 m	2,00 m	210	30	15	15	25	**24CBFX**
1,50 m	2,00 m	210	30	15	15	25	**24CWBFX**
1,50 m	2,00 m	210	30	15	15	25	**24CRFX**
1,50 m	2,00 m	210	30	15	15	25	**24CBLFX**
3,00 m	2,00 m	420	56	33	14	16	**20CBFX**
3,00 m	2,00 m	420	56	33	14	16	**20CWBFX**
3,00 m	2,00 m	420	56	33	14	16	**20CRFX**
3,00 m	2,00 m	420	56	33	14	16	**20CBLFX**
5,00 m	2,00 m	900	90	55	15	12	**25CBFX**
5,00 m	2,00 m	900	90	55	15	12	**25CWBFX**
5,00 m	2,00 m	900	90	55	15	12	**25CRFX**
5,00 m	2,00 m	900	90	55	15	12	**25CBLFX**
7,00 m	2,00 m	1200	120	55	15	12	**22CBFX**
7,00 m	2,00 m	1200	120	80	15	8	**22CWBFX**
10,00 m	2,00 m	1350	135	84	15	8	**29CBFX**
10,00 m	2,00 m	1350	135	84	15	8	**29CWBFX**



static

◆	◆	LED	P (W)			
1,50 m	2,00 m	342	30	18	20	**24C-B**
1,50 m	2,00 m	342	30	18	20	**24CW-B**
3,00 m	2,00 m	540	35	18	15	**20C-B**
3,00 m	2,00 m	540	35	18	15	**20CW-B**
5,00 m	2,00 m	900	65	18	9	**25C-B**
5,00 m	2,00 m	900	65	18	9	**25CW-B**
7,00 m	2,00 m	1080	72	18	9	**22C-B**
7,00 m	2,00 m	1080	72	18	9	**22CW-B**
10,00 m	2,00 m	1350	58	18	10	**29C-B**
10,00 m	2,00 m	1350	58	18	10	**29CW-B**

product info

Ideal for decorating facades Trees or for cross-street motifs.

Up to 30 curtains on the same power supply.


Compatible with the entire range

Connection options with the Octoplus 230V by Blachere® accessories p.182 to 184.



ECO Led curtains static

rubber · IP65 · incl. · 230V · NEW

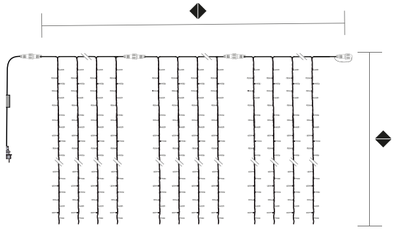

◆	◆	LED	P (W)			
1,50 m	2,00 m	210 ○	15	15	20	**ECOX24-B**
1,50 m	2,00 m	210 ●	15	15	20	**ECOX24W-B**
3,00 m	2,00 m	360 ○	20	15	15	**ECOX20-B**
3,00 m	2,00 m	360 ●	20	15	15	**ECOX20W-B**
5,00 m	2,00 m	576 ○	30	16	12	**ECOX25-B**
5,00 m	2,00 m	576 ●	30	16	12	**ECOX25W-B**
7,00 m	2,00 m	750 ○	50	15	7	**ECOX22-B**
7,00 m	2,00 m	750 ●	50	15	7	**ECOX22W-B**
10,00 m	2,00 m	1050 ○	55	15	6	**ECOX29-B**
10,00 m	2,00 m	1050 ●	55	15	6	**ECOX29W-B**

product info

Unbeatable value for money with proven reliability.


NEW: Octoplus 230V by Blachère connection system

An extensive selection of accessories and connection options with Octoplus® 230V by Blachère® accessories p.182 to 184.



Joylight® 24V curtains with flash



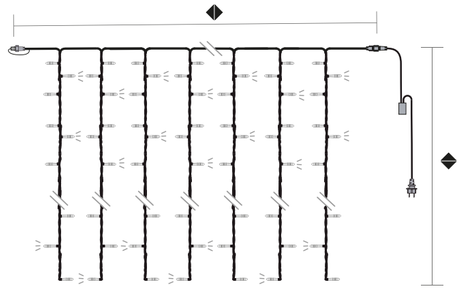

		LED	FLASH	P (W)			
3,00 m	2,00 m	300	60	12,5	15	2	**FL203-FX**
3,00 m	2,00 m	300	60	12,5	15	2	**FL203W-FX**
3,00 m	2,00 m	300	60	12,5	15	2	**FL203B-FX**
3,00 m	2,00 m	300	60	12,5	15	2	**FL203R-FX**
3,00 m	2,00 m	300	60	12,5	15	2	**FL203P-FX**

product info

Increased number of fl ashing LEDs on this range of garlands with


1 flashing LED out of 5

Ensure the safety of the public with 24V range




“Scintillance” curtains Champs Élysées



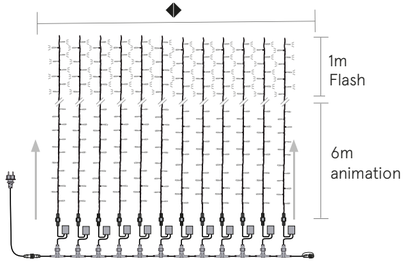

FL216W-CE

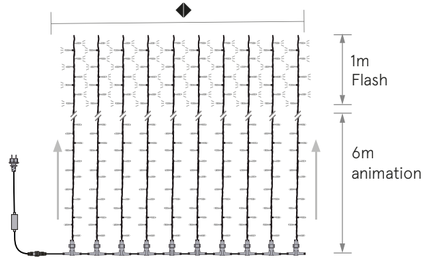

ECOX216W

		LED	FLASH	P (W)			
7,00 m	2,10 m	456	96	30	12	10	**FL216W-CE**
7,00m	2,00m	420	80	55	10	-	**ECOX216W** NEW

product info

Recreate the most beautiful avenue in the world where ever you are !

Product and animation developed exclusively for the Champs Elysées now available for all our customers.


Blachère illumination official supplier of the « Champs Elysées » Committee.

A PRO version that exactly reproduces the effect on the Champs Elysées and an ECO version with a simplified effect.



Joylight®
Slowglow curtains

rubber · IP66 · incl. · 230V

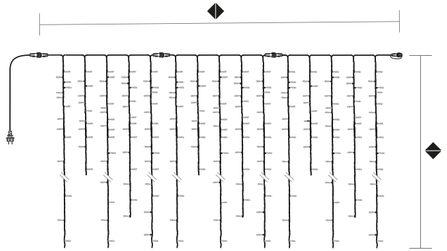

◆	◆	LED Slowglow	P (W)			
1,50 m	2,00 m	120 ○	16	15	13	**24SG**
1,50 m	2,00 m	120 ●	16	15	13	**24WSG**
3,00 m	2,00 m	180 ○	15	15	12	**20SG**
3,00 m	2,00 m	180 ●	15	15	12	**20WSG**
5,00 m	2,00 m	210 ○	17	15	12	**25SG**
5,00 m	2,00 m	210 ●	17	15	12	**25WSG**
7,00 m	2,00 m	225 ○	17	15	12	**22SG**
7,00 m	2,00 m	225 ●	17	15	12	**22WSG**
10,00 m	2,00 m	270 ○	15	15	13	**29SG**
10,00 m	2,00 m	270 ●	15	15	13	**29WSG**

product info

New animation exclusive to Blachère Illumination.

Gentle lighting effect, snowflake effect.


Compatible with the entire range.

Connection options with Octoplus® 230V by Blachère® accessories p.182 to 184.



Ceilings with flash or static



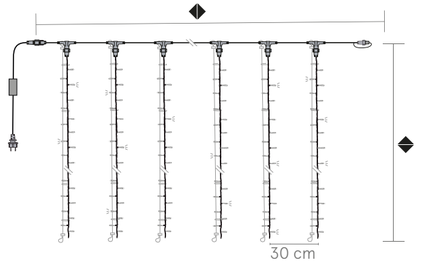



with flash

		LED	FLASH	P (W)			
30,00 m	2,00 m	588	98	30	7	3	**414-FX**
30,00 m	2,00 m	588	98	30	7	3	**414W-FX**

static

		LED	P (W)			
30,00 m	2,00 m	686	30	7	3	**414**
30,00 m	2,00 m	686	30	7	3	**414W**

product info


Cover up to 180 sqm on only one power supply:

The 24V/100w transformer for outdoor use supplied with the 414-FX and 414W-FX garlands allows two sets to be connected to a single transformer.


Each string is doubled with a micro steel wire for better resitance and range.



Stalactitlight® with flash or static

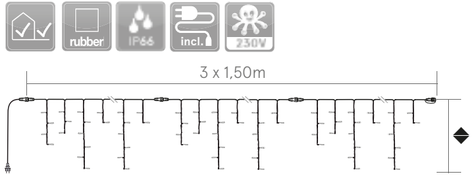

352-FX / 352W-FX / 352R-FX / 352B-FX / 354-FX
354W-FX / 352 / 352W / 354 / 354W



353C / 353CW

with flash

		LED	FLASH	P (W)			
0,57 m	4,50 m	156	48	13	48	15	**352-FX**
0,57 m	4,50 m	156	48	13	48	15	**352W-FX**
0,57 m	4,50 m	156	48	13	48	15	**352R-FX**
0,57 m	4,50 m	156	48	13	48	15	**352B-FX**
1,00 m	4,50 m	180	60	12	36	15	**354-FX**
1,00 m	4,50 m	180	60	12	36	15	**354W-FX**

static

		LED	P (W)			
0,57 m	4,50 m	180	12	48	15	**352**
0,57 m	4,50 m	180	12	48	15	**352W**
1,00 m	4,50 m	240	12	36	15	**354**
1,00 m	4,50 m	240	12	36	15	**354W**
1,50 m	4,50 m	320	16	32	15	**353C**
1,50 m	4,50 m	320	16	32	15	**353CW**

product info

An absolute must since its creation, this product is a best-seller owing to its reliability.
Can be divided into 10m sections for greater adaptability.


Compatible with the entire range.

Connection possibilities with the Octoplus 230V by Blachere® accessories p.182 to 184.



Fir tree stalactites with flash and decorations



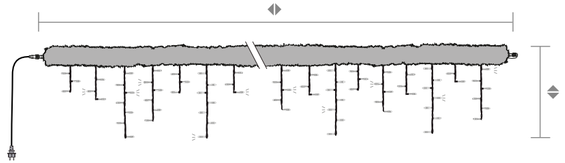

		LED	FLASH	P (W)			ø 140mm	
0,57 m	4,50 m	156	48	13	48	15	○	**GP138L**
0,57 m	4,50 m	156	48	13	48	15	●	**GP139L-W**

+



Pack of 4	Pack of 4	Pack of 4	Pack of 4	Pack of 4	Pack of 4
DKOD-01	**DKOD-02**	**DKOD-03**	**DKOD-04**	**DKOD-05**	**DKOD-06**

product info

An animated and modular light decoration, ideal for decorating facades or cross-street motifs.

Decoration composed of a green or white christmas garland stalactite cross street motif with a choice of pendant motifs depending on the desired theme.

Pendant motifs in packs of 4.

Compatible with the entire range.

Connection possibilities with the Octoplus 230V by Blachere® accessoires p.182 to 184.



Fil lumière® (ropelight) Led+ or Platinium

IP55 | incl. | -30°C

LED+

50 Led/m


Horizontal LED

Ø

PLATINIUM

30 Led/m

inverted 320° LED cone vertical position



The use of inverted cone LED (see diagram) enables Blachère LED Garlands and Fil lumiere products to offer exceptional luminosity

Fil Lumière® Led+

ø	LED	P (W)/rouleau	Rouleau de 25m
13mm	50 Led au m	80	**NLED51+**
13mm	50 Led au m	80	**NLED51W+**
13mm	50 Led au m	80	**NLED52+**
13mm	50 Led au m	80	**NLED54+**
13mm	50 Led au m	75	**NLED56+**
13mm	50 Led au m	75	**NLED57+**
13mm	50 Led au m	80	**NLED58+**

Fil Lumière® Platinium

ø	LED	P (W)/m	Rouleau de 50m
12mm	30 Led au m	4	**NLEDU51**
12mm	30 Led au m	4	**NLEDU51W**
12mm	30 Led au m	4	**NLEDU52**
12mm	30 Led au m	4	**NLEDU53**
12mm	30 Led au m	4	**NLEDU54**
12mm	30 Led au m	4	**NLEDU56**

product info

Fil lumière® LED+ and Platinium : Ideal for highlighting facade.


Supplied with 3 special LED power supplies, 3 end caps, 3 connectors.

Strictly for professional use. Cannot be retailed in shops



Sparklight® garlands static



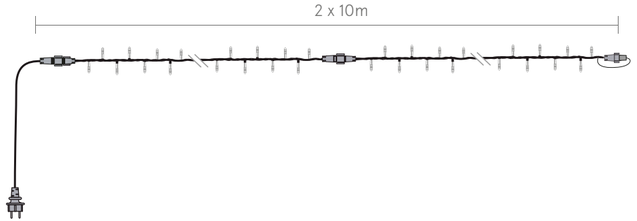

	LED	P (W)		
20,00 m	120	8	5	**DKO521**
20,00 m	120	8	56	**DKO521W**

product info


The indoor range has been specially developed for indoor decoration, shopping centres, shops, reception lobbies, etc.

Top-of-the-range finishings with finer PVC silver cable



Joylight® curtains with slowflash or static



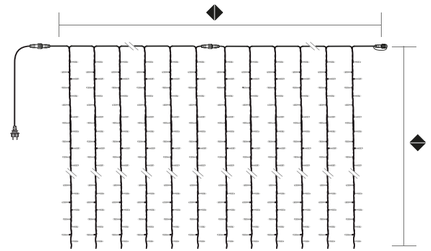

with slowflash

◆	◆	LED	SLOWFLASH	P (W)			
1,00 m	2,00 m	150 ○	45 ○	15	15	13	**DKO23F**
1,00 m	2,00 m	150 ●	45 ○	15	15	13	**DKO23WF**
1,50 m	2,00 m	165 ○	45 ○	15	15	15	**DKO24F**
1,50 m	2,00 m	165 ●	45 ○	15	15	15	**DKO24WF**
3,00 m	2,00 m	270 ○	90 ○	19,5	15	11	**DKO20F**
3,00 m	2,00 m	270 ●	90 ○	19,5	15	11	**DKO20WF**
5,00 m	2,00 m	432 ○	144 ○	30	15	5	**DKO25F**
5,00 m	2,00 m	432 ●	144 ○	30	15	5	**DKO25WF**

static

◆	◆	LED	P (W)			
1,50 m	2,00 m	210 ○	15	15	15	**DKO24-B**
1,50 m	2,00 m	210 ●	15	15	15	**DKO24W-B**
3,00 m	2,00 m	360 ○	19,5	15	11	**DKO20-B**
3,00 m	2,00 m	360 ●	19,5	15	11	**DKO20W-B**
5,00 m	2,00 m	576 ○	30	16	5	**DKO25-B**
5,00 m	2,00 m	576 ●	30	16	5	**DKO25W-B**

product info

The indoor range has been specially developed for indoor decoration, shopping centres, shops, reception lobbies, etc.


Top-of-the-range finishings with finer PVC silver cable.

Connection possibilities with the Octoplus 230V by Blachere® accessoires p.182 to 184.



Stardust curtains with flash



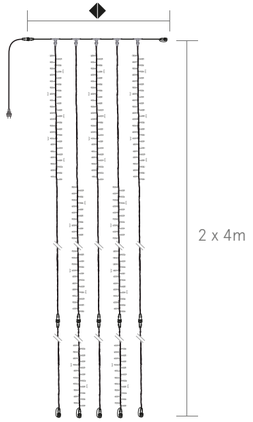

		LED	FLASH	P (W)			
8,00 m	1,00 m	700	100	40	5	3	**DKO2W-B3**

product info

Galvanize your project with the fl ash animation of this product.

The indoor range has been specially developed for indoor de-coration, shopping centres, shops, reception lobbies, etc.

Top-of-the-range finishings with finer PVC silver cable.


Compatible with the entire range.

Connection possibilities with the Octoplus 230V by Blachere® acces-soires p.182 to 184.



Stalactitlight® with slowflash or static



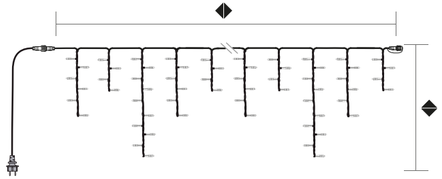

with slowflash

◆	◆	LED	SLOWFLASH	P (W)			
0,35 m	3,00 m	60 ○	20 ○	5	12	30	**DKO362F**
0,35 m	3,00 m	60 ○	20 ○	5	12	30	**DKO362WF**
1,30 m	3,90 m	120 ○	40 ○	10	24	25	**DKO361F**
1,30 m	3,90 m	120 ○	40 ○	10	24	25	**DKO361WF**

static

◆	◆	LED	P (W)			
0,35 m	3,00 m	80 ○	5	12	30	**DKO362**
0,35 m	3,00 m	80 ○	5	12	30	**DKO362W**
1,30 m	4,00 m	160 ○	10	24	25	**DKO361**
1,30 m	4,00 m	160 ○	10	24	25	**DKO361W**

product info

Galvanize your project with the fl ash animation of this product.

The indoor range has been specially developed for indoor decoration, shopping centres, shops, reception lobbies, etc.


Top-of-the-range finishings with finer PVC silver cable.

Compatible with the entire range.

Connection possibilities with the Octoplus 230V by Blachere® accessoires p.182 to 184.



Hanging bouquets indoor & outdoor

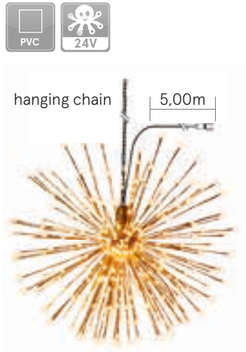

Indoor use / IP20

ø	Colour	LED	FLASH	P (W)	
0,80 m	Silver	441	63	25	**FCL080A**
0,80 m	Gold	441	63	25	**FCL080G**
Transformateur intérieur pour bouquet FCL				25	**PRTR24VI**

Outdoor use / IP55

ø	Colour	LED	FLASH	P (W)	
0,80 m	Silver	441	63	25	**FCL080A-E** NEW
0,80 m	Gold	441	63	25	**FCL080G-E** NEW
Transformateur extérieur pour bouquet FCL				25	**PRTR24V**

product info


The hanging bouquets are flash animated with a gold or silver decoration, visible by day.

Works with a PRTR24VI or PRTR24V transformer – sold separately.




Nostalgia stalactite and Garland



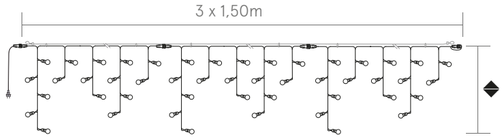

FL361W

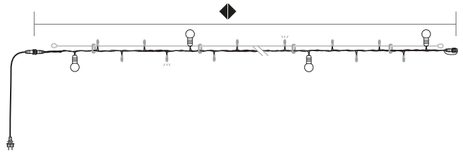

570W-FX

stalactite

		LED		P (W)			
1,00 m	4,50 m	48	48	20	15	12	**FL361W**

garland

	LED	FLASH		P (W)		
10 m	120	20	35	10	15	**570W-FX**

info produit


Garlands and stalactite « ready to install ».


Delivered with ø3mm PVC-sheathed steel rope for crosswise attachment.



Nostalgia XL suspended bulbs



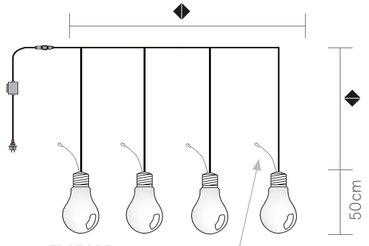



60 cm suspension and safety wire



product info

Ideal for tree decorations or suspended on ropes, these oversized bulbs also twinkle.

A very trendy retro effect !

Available in packs of 4 bulbs that come with a transformer, or singles (transformer and Octoplus accessories p.182 to 184).

Aluminium lamp cap (stainless).

set of 4 bulbs

◆	◆		microLED	FLASH	P (W)	■
2,00 m	2,00 m	ø28cm - H 50cm	400	200	8	**FL930BB**


individual bulb


1 bulb - connection on FYPRTR9 only (not supplied)	100	50	2	**G-FL930BB**
230V -> 24V transformer with Octoplus connector see p216 to 218				**FYPRTR9**




Hanging balls with animations




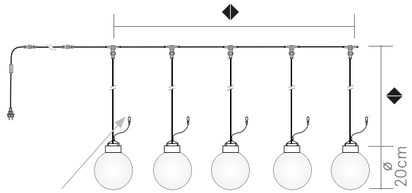

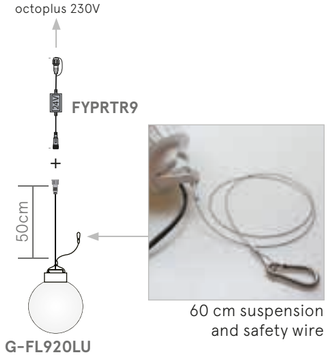



FL920M / G-FL920M
Random and unsynchronized colour change



FL920SF
G-FL920SF

FL920LU
G-FL920LU

set of 5 spheres

◆	◆	animation	○	P (W)	■
3,00 m	1,20 m	flickering effect	5 ● ø20cm	15	**FL920LU**
3,00 m	1,20 m	snowflakes projection	5 ● ○ ø20cm	24	**FL920SF**
3,00 m	1,20 m	random colour change	5 RGB ø20cm	24	**FL920M**

individual sphere

1 ball ø20cm - linking on FYPRTR9 only (not supplied)	1 ● ø20cm	3	**G-FL920LU**
1 ball ø20cm - linking on FYPRTR9 only (not supplied)	1 ● ○ ø20cm	4,5	**G-FL920SF**
1 ball ø20cm - linking on FYPRTR9 only (not supplied)	1 RGB ø20cm	4,5	**G-FL920M**
230V -> 24V transformer with Octoplus connector p184			**FYPRTR9**


product info

Ideal for tree decorations or suspended on ropes.

Simulate the warm light of candles with a new flickering animation.


A very trendy retro effect.


Set of 5 spheres or individual.

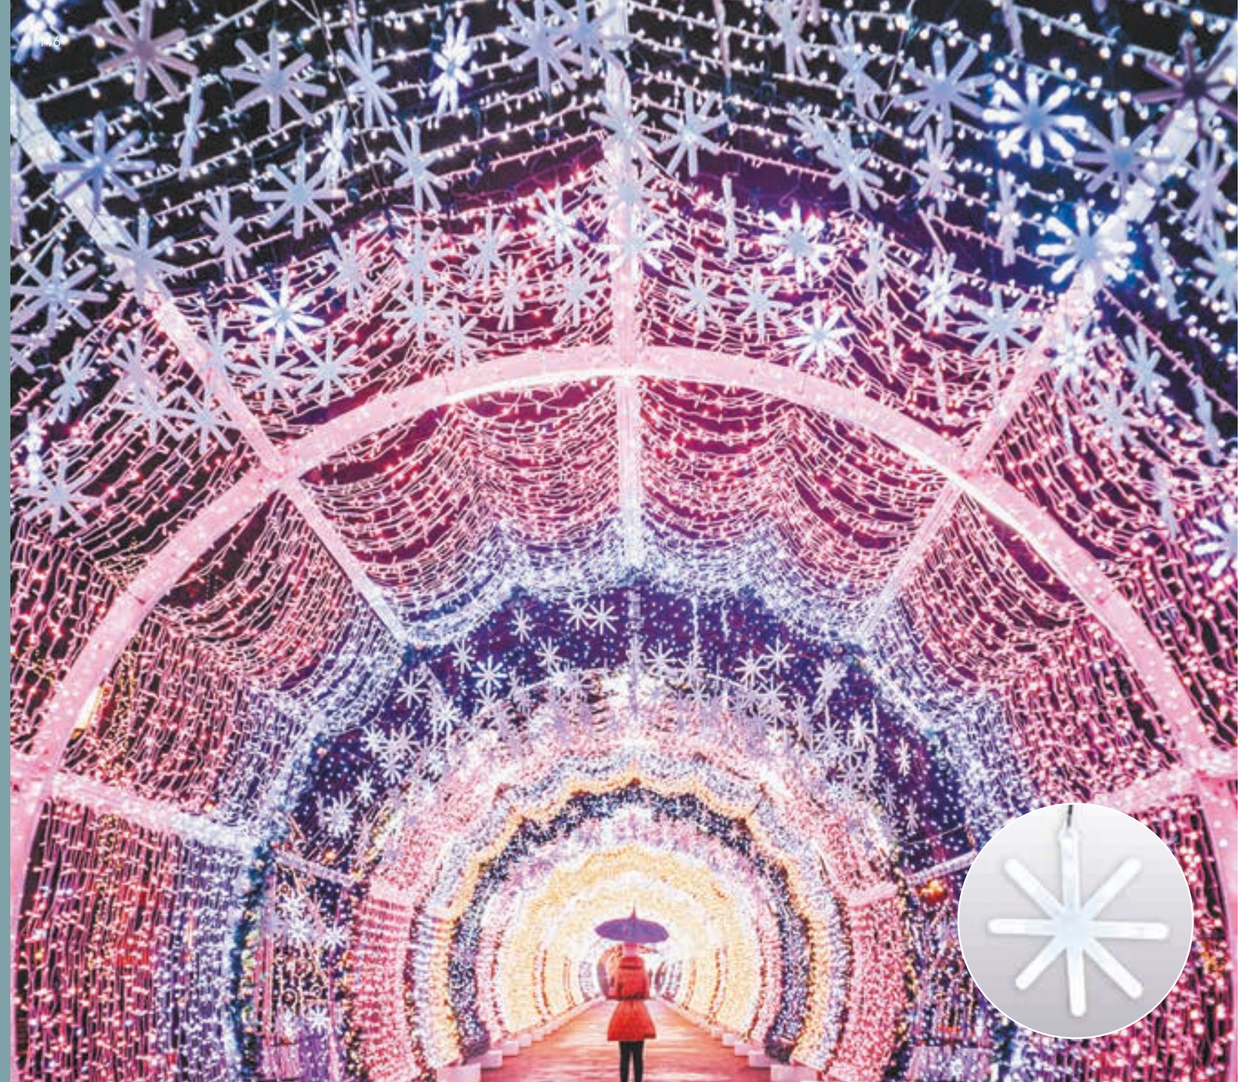

X-Led animated sparkles



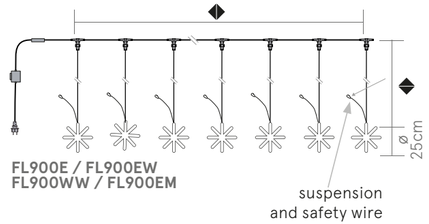



60cm suspension and safety wire



set of 10 sparkles

◆	◆◆	ø	2D LED sparkles	P (W)	■	
3,00 m	2,00 m	25cm	10 ○	30	**FL900E**	
3,00 m	2,00 m	25cm	10 ○	30	**FL900EW**	
3,00 m	2,00 m	25cm	10 ○ ○	30	**FL900WW**	NEW
3,00 m	2,00 m	25cm	10 ● ● ● ● ●	30	**FL900EM**	

individual sparkle

	2D LED sparkle	P (W)	□	
1 2D sparkle ø25cm connected on FYPRTR9 only (not supplied)	1 ○	3	**G-FL900**	
1 2D sparkle ø25cm connected on FYPRTR9 only (not supplied)	1 ○ ○	3	**G-FL900WW**	NEW
230V -> 24V transformer with Octoplus connector see p184			**FYPRTR9B**	

product info

Now available in a two-tone version warm white/cold white: 2 effects in 1!!

Exclusive to Blachere, registered design, X-Led animated sparkles is a brand best steller.

Smooth animation. Daytime effect provided by the milky white polycarbonate.


Light and easy to mount on all kinds of trees or on rope using the hooks supplied.


Set of 10 or individual.



Double drop double-sided X-Led® stems









FXL08-B22
Suspension attachment and securing required during installation

◆	◆	LED	P (W)			■
0,50 m	2,70 m	320 ○	12	5	2	**FXL055**
0,80 m	2,70 m	480 ○	17	5	2	**FXL085**

X-Led stem for B22/230V socket FY03B22 accessories on p217

◆	LED	P (W)	■
0,80 m	96 ○	2	**FXL08-B22**

product info

A smooth double-drop animation, exclusive to Blachère, registered design, bringing success to the brand especially with the Champs Elysées project.

Double-sided stems for 360 degree brightness.


Multiple uses on facades, crossstress motifs or tree decorations.

Multi-output accessory FY04FXL : 20 stems on a single power supply !



Light stems with flash



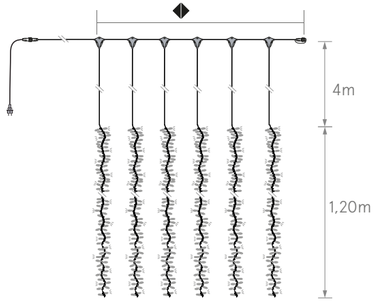

		LED	FLASH	P (W)			
1,20 m	1,20 m	480	120	50	6	3	**950-FX**
1,20 m	1,20 m	480	120	50	6	3	**950W-FX**

product info


Very light weight products that can be suspended from all kinds of branches.

Flash animation.



Light cascade



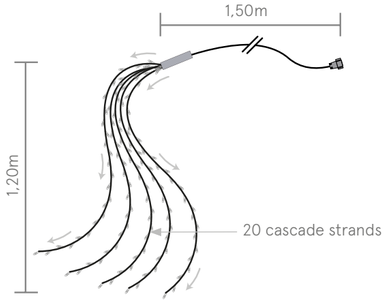

	LED	P (W)		
1,20 m	480	8	2	**BRIN480**
1,20 m	480	8	2	**BRIN480W**
rallonge 2m				**FY04W-PVC**
alimentation à découpage 24V dc-25W (pour 2 cascades max.)				**PRTR24V**
connecteur en Y				**FY030M-B**

product info

This sophisticated new product, **equally beautiful by day,** offers a **cascade effect animation.**


Super-simple to mount with hook, ideal for decorating candelabras and facades.


Accessories sold separetly.



Folding sphere and star pendant motifs



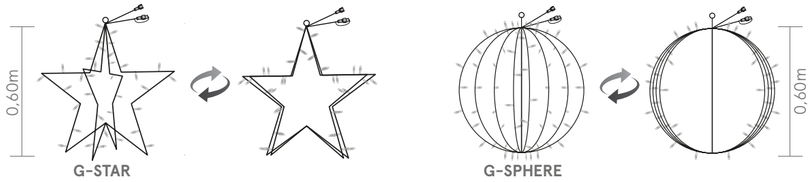

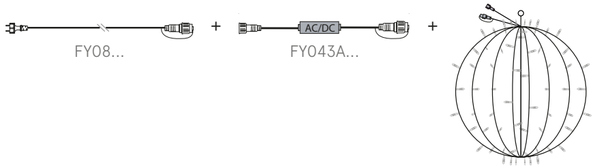

◆	ø	LED	FLASH	P (W)	□
0,60 m	0,60 m	70 ○	6 ☼	4	**G-SPHERE**
0,60 m	0,60 m	41 ○	4 ☼	4	**G-STAR**
1,50m	230V power supply cable		690W max - see p182 to 184		**FY08-B+**
0,30m	bridge rectifier		690W max - see p182 to 184		**FY043A-B+**

product info

These new folding pendant motifs have slow fl ash animation and are beautiful by day.


Compatible with the entire range.

Connection possibilities with the Octoplus 230V by Blachère® accessories p.182 to 184.



Multi-motifs twigs





FY030M accessories





Product used for Dior facade
Avenue Montaigne - Paris

set of 3 twigs

◆	LED	P (W)	■
3x 1,80 m	3x 161 ○	3x 5	**BRIN180**
3x 1,80 m	3x 161 ●	3x 5	**BRIN180W**
24V – 3 output transformer for BRIN180/180W			**FY04BRIN**
double output Y connector			**FY030M**

product info

Save 40 % on installation time !

Tree wiring quick and easy thanks to the double-output Y connector FY030M.


Operates with 24V transformer 24V FY04BRIN.

3 output for twigs BRIN180/180W supplied with 3 x 2m extension leads for connecting up to **6 sets of 3 branches on a single power supply.**



Pre-lighted swag garland



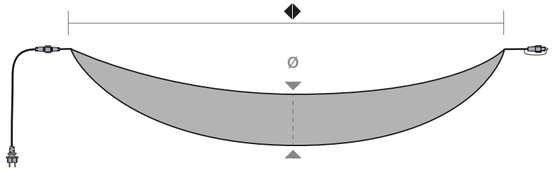

swag garland per unit

◆	ø	LED	P (W)		■
3,00 m	0,35 m	400	30	6	**GP303W**
4,00 m	0,35 m	500	38	4	**GP304W**

product info


Great classic of traditional street decorations.

Quick-fi t accessories, extension leads, multi-socket connectors : see p2116 to 218



Synthetic pre-lighted fir tree garlands (set of 2)



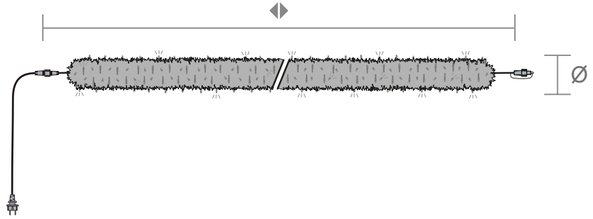

with flash

◆	ø	LED	FLASH	P (W)		■
2,70 m	0,30 m	180	60	11	10	**GP134LWFX**

static

◆	ø	LED	P (W)		■
2,70 m	0,30 m	240	11	10	**GP134L-W**

product info


Great classic of traditional street decorations.

Quick-fi t accessories, extension leads, multi-socket connectors : See p216 to 218.



Braid garlands with flash or static



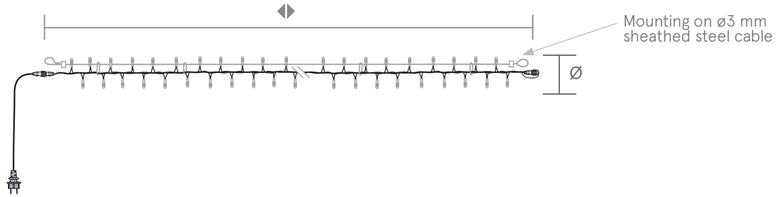

with flash

◆	ø	LED	FLASH	P (W)		
7,50 m	12,00 cm	210 ○	30 ○	13	13	**TSL3FX**
7,50 m	12,00 cm	210 ●	30 ○	13	13	**TSL3WFX**

static

◆	ø	LED	P (W)		
7,50 m	6,00 cm	240 ○	13	13	**TSL2**
7,50 m	6,00 cm	240 ●	13	13	**TSL2W**

product info

« Ready-to-fi t ».


Strong lighting density.

Supplied on Ø 3mm sheathed steel wire rope.
Quick-fi t accessories,
Multi-socket connectors,
Animation kit : p216 to 218



Nicia® garlands with flash



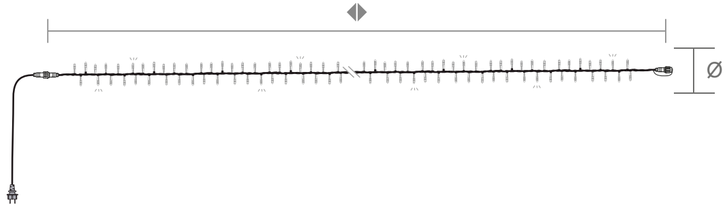

	ø	LED	FLASH	P (W)		
6,00 m	6,00 cm	432	48	23	9	**558-FX**
6,00 m	6,00 cm	432	48	23	9	**558W-FX**

product info

« Ready-to-fi t ».

Strong lighting density.

Quick-fi t accessories,
Multi-socket connectors,
Animation kit : p216 to 218

Garlands with B22 sockets

rubber | 230V | IP54



roll of garland with B22 sockets - Power supply not included

	description	cable section	B22
100 m	roll of garland 1 socket/m (100 sockets)	■ 2 x 1,5 mm²	**G098C**
100 m	roll of garland 2 sockets/m (200 sockets)	■ 2 x 1,5 mm²	**G099C**
100 m	roll of garland 3 sockets/m (300 sockets)	■ 2 x 1,5 mm²	**G100C**
50 m	roll of garland 4 sockets/m (200 sockets)	■ 2 x 1,5 mm²	**G112C**
50 m	roll of garland 5 sockets/m (250 sockets)	■ 2 x 1,5 mm²	**G113C**
100 m	roll of garland 3 sockets/m (300 sockets)	□ 2 x 1,5 mm²	**G100C-B**

garlands with B22 sockets - Power supply included

	description	cable section	B22
9 m	garland of 20 sockets	■ 2 x 1,5 mm²	**G1C**
15 m	garland of 40 sockets	■ 2 x 1,5 mm²	**G2C**

product info

Customise your garland with different bulbs suggested on p 199 and make up your own eye-catching effect.

Replace your old incandescent bulbs with LED bulbs, new technology with vintage look but more economical so more ecological.

Ideal for your summer decorations, creating a festival atmosphere.



Starflashs® Led bulbs



registered design

In outdoor use, must be mounted on garland with B22 bulbs minimum IPX4 with waterproof seal fitted.

description	socket	packing	P (W)	max joule	reference
pure white	B22	unit	1 W	0,5 joules	**F722-L**
pure white	B22	unit	1,3 W	2 joules	**F732-L**

product info

A historic product that's easy to use on a garland with a B22 socket.

Produces about 1 flash every 3 seconds.



B22 & E27 bulbs



LDL B22/E27 range (registered design)



série LDLH B22 SMD



In outdoor use, must be mounted on garland with B22 bulbs minimum IPX4 with waterproof seal fitted.







description	B22	E27	B22
type of globe	polycarbonate	polycarbonate	polycarbonate
ø of globe	45 mm	45 mm	45 mm
voltage	230V	230V	230V
intensity	3,68VA	3,68VA	3,68VA
wattage	16 mA max/ 0,5W	16 mA max/ 0,5W	16 mA max/ 0,5W
packing	set of 25	set of 25	set of 25
use	outdoor	outdoor	outdoor
pure white	**LDL11-B22**	**LDL11-E27**	**LDLH11**
warm white	**LDL11W-B22**	**LDL11W-E27**	**LDLH11W**
amber	**LDL12-B22**	**LDL12-E27**	**LDLH12**
red	**LDL13-B22**	**LDL13-E27**	**LDLH13**
blue	**LDL14-B22**	**LDL14-E27**	**LDLH14**
green	**LDL16-B22**	**LDL16-E27**	**LDLH16**
pink	**LDL18-B22**	-	**LDLH18**

Bulbs : low power consumption - Note use the appropriate power (20 mA i.e 5 VA) to calculate the rating of your network (cable cross-sectional area, circuit breaker, power required etc.). Use 0,5W per bulbs to calculate the power consumption.

product info

The LDL series is a classic Blachère illumination. With this patented model, the arrangement of the LEDS in the bulb creates a "filament effect" like in old incandescent bulbs.

The polycarbonate bulb guarantees increased strength (IK06).








PRJA-W

Led Projectors

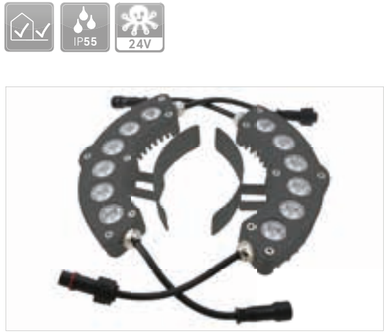

PRJA-W / PRJA



PRJP-01+ / PRJP-01W+

Rounded projectors for trees (set of 2)

dimensions	LED	voltage	P (W)	reference
180 x 55 x 24 mm	6X	24V	2 x 6W	**PRJA**
180 x 55 x 24 mm	6X	24V	2 x 6W	**PRJA-W**
switch-mode power supply 24V dc 25W (for a set of 2)				**PRTR24V**
elastic strap for PRJA-W and PRJA projectors				**FYSDOW**
protective and adhesive foam (set of 10)				**FY-MOUS**

Led projectors (set of 3)

transformer	LED	spacing between projectors	voltage	P (W)	packing	reference
inclus		1 m	230V/12V	12W	lot de 3	**PRJP-01+**
inclus		1 m	230V/12V	12W	lot de 3	**PRJP-01W+**

info produit

Illuminate tree trunks or branches with our curved micro projectors! They may be small, but they are super powerful!
Bright and elegant results, easy to set up.
Totally safe for the public (24V) and trees (elastic fasteners + protective foam).

Extensions and accessories p218.

With these 3 projectors that come with a 230V/12V transformer, you can quickly and easily light up shrubs, bushes, planters, etc.
Their stake means they can be easily planted in the ground.




DMX controllable LED projectors and wall washers





PRJP3-DMX

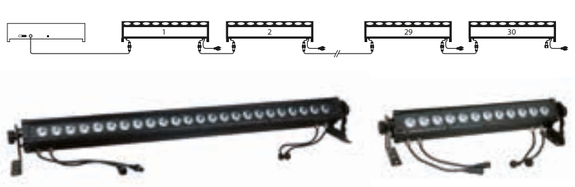

PRJR2-DMX

PRJR1-DMX

DMX controllable LED projectors

dimensions	LED	spreading angle	⚡	☒	P (W)	reference
320 x 212 x 195 mm	18 RGB	45°	230V	5kg	70W	**PRJP3-DMX**
Interface DMX box including 12V power supply (to be installed in waterproof housing – not included) w						**PR-DMX**

DMX controllable RGB wall washer

◆	LED	spreading angle	⚡	☒	P (W)	reference
58 cm	18 RGB	45°	230V	2,6kg	45W	**PRJR1-DMX**
110 cm	24 RGB	45°	230V	6,7kg	80W	**PRJR2-DMX**
3 m	230V DMX power supply					**FY1AL-DMX**
6 m	DMX extension lead					**FY5P-DMX**
6 m	DMX signal extension lead					**FY5S-DMX**

product info

New range of RGB strip lights. Perfect for facades or monument illuminations.

Use of the SMD RGB led for a better lighting result.

Independent controller bringing greater autonomy thanks to the 10 pre-programmed animations or DMX interface box ref PR-DMX.
For more information, please contact us.



Gobo projector RGBW

rubber | 230V | IP65 | NEW



PRJPGOBO1



PRM-GOBO1



PRP-GOBO1

dimensions	LED	⚡		☒	P (W)	Gobo size	reference
648 x 344 x 273 mm	gobo projector RGBW	100-240V	50/60Hz	16kg	250W	66 mm	**PRJPGOBO1**
501 x 400 x 350 mm	Wall mount for PRJPGOBO1						**PRM-GOBO1**
501 x 252 x 400 mm	Pole mount for PRJPGOBO1						**PRP-GOBO1**

product info

Rotary projector
Can be used manually or with DMX.

N.B.
- Gobo size M-66 mm.
- Pole mount bracket or wall mount sold separately.

Octoplus by Blachère®

Exclusivity



Octoplus by Blachere® 230V connector, protection rating **IP67**, according the European standard EN60529 on the degree of protection provided by enclosures.



Safety extra-low voltage connector 12/24V

Octoplus is the connector that enables **fast and multiple connection** between our decorations and most of our range of garlands.
Each item that is marked "Octoplus" can therefore **be connected** to another "Octoplus" item.
This means **the combination of items is infinite** just by simplifying the electrical connections.


Octoplus®: Example of use No1



For a transverse motif

Ref.	Quantity	Page
FY08-B+	1	216
FY043A-B+	1	216
FY01-3B+	1	216
FL390WBF+	1	127
FYT-B+	2	216
ITL021	2	33

To install on steel wire with PVC sheath

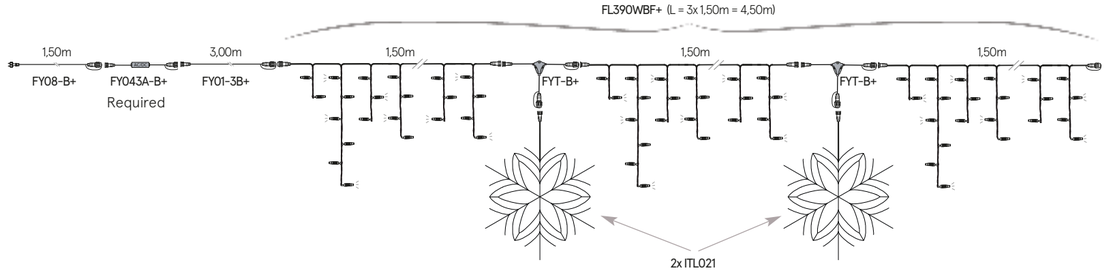


Octoplus®: Example of use No2




For a width of 4.50m

Ref.	Quantity	Page
FY08-B+	1	216
FY043A-B+	1	216
FY01-2B+	1	216
354CW	1	147
FYT-B+	2	216
FYPRTR9	2	218
G-FL900	2	173

To install on steel wire
with PVC sheath

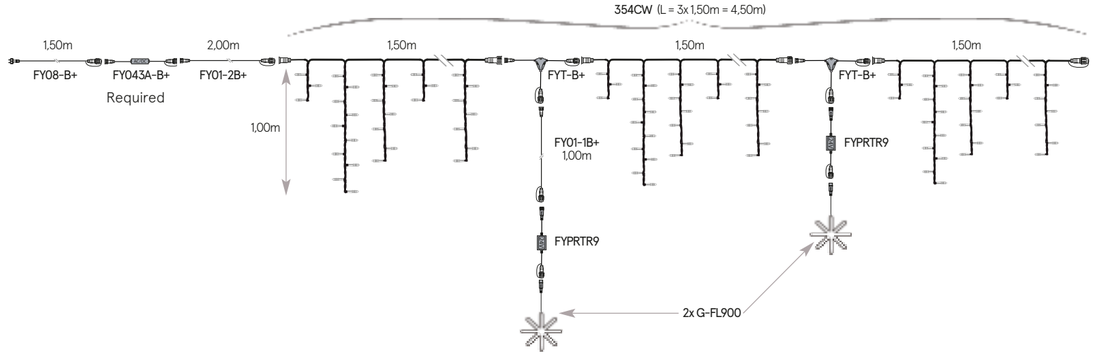






Octoplus®: Example of use No3

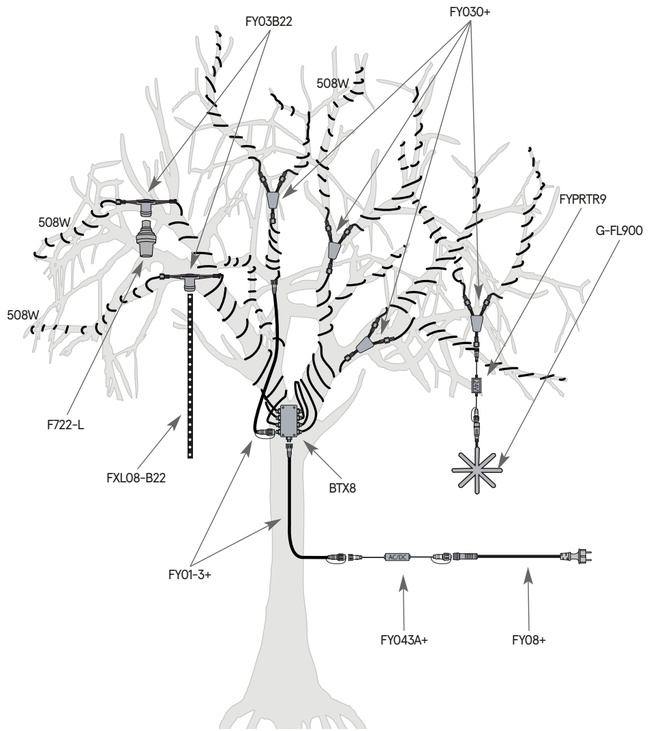


Ref.	Quantity	Page
FY08-B+	1	216
FY043A-B+	1	216
FY01-3+	2	216
BTX8	1	216
508W	10	129
FY030+	4	216
FYPRTR9	1	218
G-FL900	1	173
FY03B22	1	217
FXL08-B22	1	175
F722-L	1	197








230V Connections

Diagram/Picture	Description	Obs.	■	□
	Power cable 230V - 1.5m - HO5RN-F - 2x1mm2 with male plug and female Octoplus connector	Euro	**FY08+**	**FY08-B+**
		UK	**FY08-UK+**	**FY08-BUK+**
		Swiss	**FY08-S+**	**FY08-BS+**
		Wieland	**FY08-W**	**FY08-BW**
	AC/DC bridge rectifi er (compulsory) for LED+ with Octoplus connector (M+F)	1A/230W	**FY041A+**	**FY041A-B+**
		3A/690W	**FY043A+**	**FY043A-B+**
	Octoplus extension 230V - HO5RN-F - 2x1mm²	1m	**FY01-1+**	**FY01-1B+**
		2m	**FY01-2+**	**FY01-2B+**
		3m	**FY01-3+**	**FY01-3B+**
		5m	**FY01-5+**	**FY01-5B+**
		10m (2X5m)	**FY01-10+**	**FY01-10B+**
	Set of 5 end-caps plugs		**FY1C+**	**FY1CB+**
	T connector 230V		**FYT+**	**FYT-B+**
	Y connector 230V		**FY030+**	**FY030-B+**
	W connector 230V		**FY031+**	**FY031-B+**
	Collector - 230V - HO5RN-F L = 2 x 1.60m = 3.20m 20cm between connectors with 16 sockets and steel wire with PVC-coating 690 W max in total		**FY023+**	**FY023-B+**

230V Connections

Diagram/Picture	Description	Obs.	■	□
	IP66 multi-socket box with 4 Octoplus (F) outputs and one Octoplus (M) input	690 W max	**BTX4**	**BTX4-B**
	IP66 multi-socket box with 8 Octoplus (F) outputs and one Octoplus (M) input	690 W max	**BTX8**	**BTX8-B**
	230V adaptor Sparklight and Stalactites (connector 2017 -> connector 2018)	-	**FY230F2**	**FY230F2-B**
	230V adaptor Sparklight and Stalactites (connector 2018 -> connector 2017)	-	**FY230M1**	**FY230M1-B**
	B22 bushing with M/F Octoplus connector	5W max	**FY03B22**	**FY03B22-B**
	Elasticated "SPECIAL TREE" connector to let the tree grow without any restrictions	set of 5	**FY07A**	.
	Wieland female socket (install at top of candelabra) + 6m of HO5RN-F power cable	-	**FY06-P**	-
	20cl tube of silicone sealant for full sealing of connectors (extreme environment)	-	**NLC60**	-
	IP66 quick connector for HO5RN-F cable	-	**BT04**	-
	Protective and adhesive foam	set of 10	**FY-MOUS**	-

24V Connections

Diagram/Picture	Description	Obs.	■	□
	1m extension PVC cord 24V Connectors M-C1/F-C2		**FY01-PVC**	**FY01B-PVC**
	2m extension PVC cord 24V Connectors M-C1/F-C2		**FY02-PVC**	**FY02B-PVC**
	5m extension PVC cord 24V Connectors M-C1/F-C2		**FY05-PVC**	**FY05B-PVC**
	2 output connector PVC 24V Connectors M-C1/F-C2		**FY2-PVC**	**FY2B-PVC**
	3 output connector PVC 24V Connectors M-C1/F-C2		**FY3-PVC**	**FY3B-PVC**
	230V -> 24V transformer with Octoplus connector	10W max	**FYPRTR9**	**FYPRTR9B**

Connections - Housing





Ref: C001
differential circuit-breaker
equipped with a waterproof
power plug.
(for poles)

Note : box subject to modifi cation
according to availability





Ref: C006
230V - IP55 protection housing
with insulated transformer (for a large
quantity of Spark Light /Octoplus)
with 8 AC/DC Octoplus rectified
outputs. (Ideal to reduce leakage current).

Note : box subject to modifi cation
according to availability


Fixing accessories for motifs

Picture	Infos	Réf
	Heart shape eye for ø 4mm cable set of 10	D001
	Heart shape eye for ø 6mm cable set of 10	D011
	Cable gripper for ø 4mm cable set of 10	D002
	Cable gripper for ø 6mm cable set of 10	D012
	Steel cable ø 4mm 100m roll	D005
	Steel cable ø 6mm 100m roll	D006
	Steel cable ø 4mm with PVC sheath ø 6mm 100m roll	D015
	Steel cable ø 6mm with PVC sheath ø 8mm 100m roll	D016


Picture	Infos	Réf
	Transversal unit for fastening to pole for ø 11mm cable pair	MA001
	Eyebolt L : 150mm set of 2pcs	D033
	Galvanised steel shackle ø 10mm	MA002
	Mixed stretcher unit - M10 L : 22 à 30cm	D004
	Ø 8mm Snap hook WLL 120kg	D025GM
	Ø 6mm Snap hook WLL 80kg	D025PM
	safety sling L : 60cm WLL : 70kg	D026

Fixing accessories for motifs



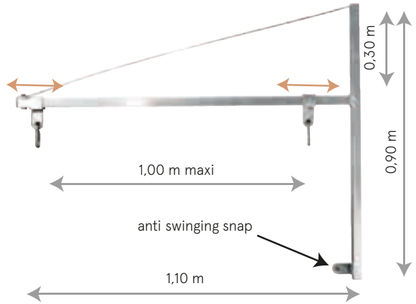

Ref: PIX01
Horizontal bracket
H:0,90 m - L: 1,10 m
inter distance max: 1,00 m -
max load: 25 kg

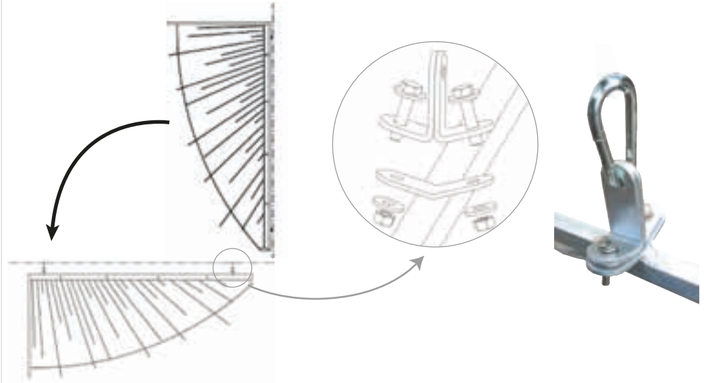

Ref: FIX02 (pair)
Fastening to convert a transverse motif
in pole motif

Fixing accessories for motifs


"Order your FIX01 fi xing to colour match your lamp columns!!!
Let us know the corresponding RAL and get a customised quotation. Contact our sales department for information"


FIX01 (pair)
Fastening device for poles





FIX01P (pair)
Strengthened fastening devices for poles (storm conditions) (wind area 3)



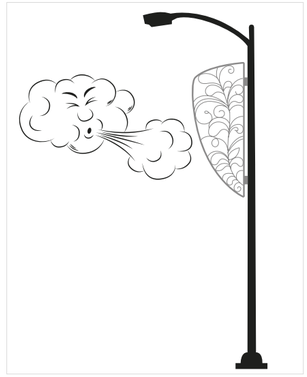

FIX01P-2 (pair)
Fastening devices for poles with 2P+T IP54 socket






Fixing accessories for motifs


"Order your FIX01 fi xing to colour match your lamp columns!!!
Let us know the corresponding RAL and get a customised quotation. Contact our sales department for information"


FIX01M (pair)
Fastening devices for façades



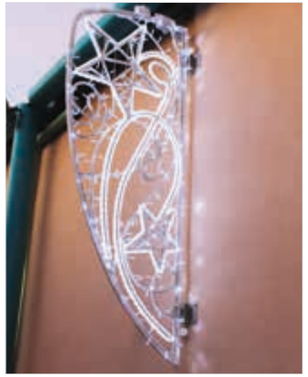

FIX01MC (pair)
Fastening devices for curved pole



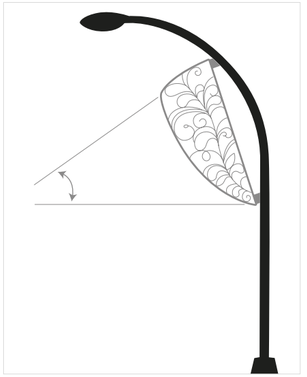


Each fastening must be individually strapped twice (see diagram).
For mtifs exceeding a height of 3.5m, it is essential to use three fasteners per motif.

Ref: D007
Stapping box including 1 cutting pliersand 1 stappin pliers.

Ref: D008
Stainless steel strap Roll of 50m thickness : 0,7mm

Ref: D009
Staple-clip for steel strapset of 100

Ref: D010
Black protection stripe for Stainless steel strap - L: 10 ml / 10 mm






Fixing accessories for motifs




In inverted cone
1PIX03 (up)
1PIX04 (down)
2 curtains H : 5m

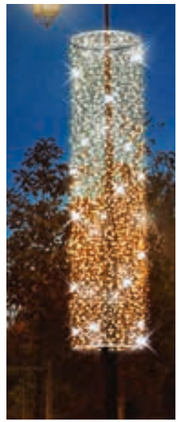


In cylinder
2 PIX03
2 curtains H : 5m



In Christmas tree
1 PIX04 (up)
1 PIX02 (down)
1 curtain H : 3m

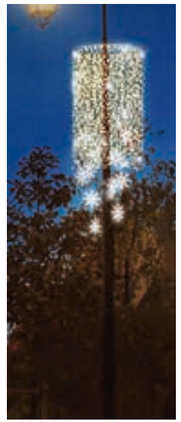

Free composition
2 PIX03
1 FL74WBF+
1 FL900E



PIX02 / PIX03



PIX04

Circular brackets

Put together low-price 3D decorations
on your columns with our circular brackets
(inner diameter adjustable)

Ref.	ø	Perimeter	pole ø	usable with
PIX04	25 cm	0,80 m	60 à 120 mm	Curtains p99, 101, 113, 119, 121
PIX02	60 cm	1,90 m	60 à 200 mm	
PIX03	130 cm	4,00 m	60 à 200 mm	

Electrical accessories for Led Fil Lumière®

rubber · 230V · IP55

Electrical accessories for LED Platinium fi l lumière®



NLC95-12 fi l lumière® Led power cord kit
The kit includes : 1 rubber power lead of 1m with plug and polarised connector + integrated AC/DC bridge rectifi er, 1 power lead spin, 1 full spin, 1 pot of glue and 1 end cap.



NLC51L Glueable L connector



NLC92-12 Standardised glueable central "spins"



NLC54-12 Glueable insulation and cap

Fixing accessories for Led fi l lumière®



NLC56 - NLC57 - NLC55



NLC59



NLC61 - Pot of glue PVC 250ml

Repair kit for Led Platinium fil lumière® - 230V - IP55 - ø 12mm

⚠ For Blachere Illumination motifs only

NLKL01-12	10 m of fil lumière®	white Led	(type NML41),	2 power leads	glue	10 connectors,	5 end caps
NLKL02-12	10 m of fil lumière®	blue Led	(type NML42),	2 power leads	glue	10 connectors,	5 end caps
NLKL06-12	10 m of fil lumière®	red Led	(type NML46),	2 power leads	glue	10 connectors,	5 end caps
NLKL01W12	10 m of fil lumière®	warm white Led	(type NML41W),	2 power leads	glue	10 connectors,	5 end caps

Ballast accessories



Ref: PLOSAC25

Pyramid ballast 25 kg
Base 38 cm x 38 cm
with carry handle



Ref: PLO1000

Concrete block 1,000 kg
H: 500 mm
L: 1,000 mm
W: 1,000 mm
with lifting hook
and forklift slot

NOTE: must be ordered in advance

Ref: PLO1500

Concrete block 1,500 kg
H: 750 mm
L: 1,000 mm
W: 1,000 mm
with lifting hook
and forklift slot

NOTE: must be ordered in advance

Scenography/decoration accessories

Picture	Infos	Ref
	Passive throne gold and red H : 1,90m L : 0,92m l : 0,84m	GP-TRONE1
	Opéra Barrier H : 1,20m L : 2,00m	BARR01
	Barrier in white pinewood H : 0,80m L : 1,80m	GP506-B
	H : 1,00 - 1,25m	GPG125OR
	H : 1,25 - 1,50m	GPG150OR
	H : 1,50 - 1,75m	GPG175OR
	H : 1,75 - 2,00m	GPG200OR
	H : 1,00 - 1,25m	GPG125BL
	H : 1,25 - 1,50m	GPG150BL
	H : 1,50 - 1,75m	GPG175BL
	H : 1,75 - 2,00m	GPG200BL
	H : 1,00 - 1,25m	GPG125R
	H : 1,25 - 1,50m	GPG150R
	H : 1,50 - 1,75m	GPG175R
	H : 1,75 - 2,00m	GPG200R

Picture	Infos	Ref
	Red - H : 1,00m	GP130
	Gold - H : 1,00m	GP131
	Red - H : 0,50m	GP132
	Gold - H : 0,50m	GP133
	Red - ø 140mm	B14-1
	Gold - ø 140mm	B14-2
	Red - ø 200mm	B20-1
	Gold - ø 200mm	B20-2
	Red - ø 280mm	B28-1
	Gold - ø 280mm	B28-2
	White cotton carpet roll 30m x 2,6m	GP500
	Red carpet roll 10m x 2m	GP510R
	Red and gold gift H : 0,55m L : 0,45m l : 0,45 m	JDK50R
	Console with push-button customizable with your logo H : 1,00m L : 0,40m l : 0,40m	PUPITRE1

Code	Page	Height	Width	Length	Diameter	Power (W)	Weight	Led colour	Animation	Flash color	Bioprint colour	No of elements	Mounting
FCL080A-E	45	0.8			0.8	15	3.62	pure white	flash	pure white		1	suspension
FCL080G-E	45	0.8			0.8	15	3.62	warm white	flash	pure white		1	suspension
FML180	53	1.5				0.2		pure white	flash	pure white		1	
FML180W	53	1.5				0.2		warm white	flash	pure white		1	
GP157W	53	2.1			1.35	40	18	warm white				1	ground
GSV140	53	1.4			0.6							2	ground
GSV140B	53	1.4			0.6							2	ground
GX001-L	86	5			5	315	206	pure white				51	ground
GX001-LW	86	5			5	315	206	warm white				51	ground
GX016LW-S	82	3.52			5	515	150	pure white / warm white	xled / flash	pure white	white	30	ground
GX039L	75	2.2	2.4	0.7		95	56	multicoloured	flash / slowglow	pure white		1	ground
GX042L	73	2.2	1.2	0.8		18	39	pure white / warm white	flash	pure white	gold	1	ground
GX048LW	45	0.73	0.48	0.48		40	4.3	warm white	anim			1	transverse
GX057LW	51	2.5			1.6	40	53	warm white				1	ground
GX058LW	51	2.1	0.24	0.48		15	31	warm white				1	ground
GX059LW	51	3	0.4	0.8		24	32	warm white				1	ground
GX060L	85	5			2.4	360	199	pure white				17	ground
GX060L-W	85	5			2.4	360	199	warm white				17	ground
GX070LR-S	80	3.9	3.6	3.3		260	235	warm white / red			gold / red	11	ground
GX075LW-S	61	5	1.2	1.2		170	32	warm white				1	transverse
GX076LW-S	61	5			2.4	480	57	warm white				2	transverse
GX081LW	40	5			3.56	235	257	warm white	slowglow			42	ground
GX082LW	40	8			4.7	770	1112	warm white	slowglow			107	ground
GX083LW	40	12			5.9	1870	2750	warm white	slowglow			194	ground
GX086L	75	4	2.7	2.5		226	259	multicoloured	flash	pure white		4	ground
GX086L-A	75	4	2.7	2.5		226	259	multicoloured	interactivity / flash	pure white		4	ground
GX087L	75	2	2	1.45		75	87	multicoloured	flash	pure white		1	ground
GX092L	72	2.2	1.15	0.7		22	30	warm white / red	flash	pure white		1	ground
GX093L	72	2	1.2	0.6		22	22	warm white / red	flash	pure white		1	ground
GX097L	74	2	1.3	0.6		24	31	multicoloured			gold	1	ground
GX098L	74	2.3	1.5	0.9		38	58	multicoloured			gold	1	ground
GX104L-S	73	2.15	0.85	0.96		62	30	pure white / warm white			white / gold	3	ground
GX116LW	45	0.7		0.6		15	2.8	warm white	anim			1	suspension
GX117LW	44	2			1.5	126	33	warm white	slowflash	warm white	gold	1	suspension
GX130L	74	1.85	1	1		91	38	warm white				1	ground
GX132L	73	3.6	2.6	1.9		101	96	pure white / red	flash	pure white	gold	3	ground
GX135LW-S	76	1.5	1	1.16		29	25	warm white			Tubbing transparent	1	ground

Code	Page	Height	Width	Length	Diameter	Power (W)	Weight	Led colour	Animation	Flash color	Bioprint colour	No of elements	Mounting
GX136LW-S	77	4	3.66	4.6		116	97	warmwhite			Tubbing transparent	3	ground
GX137LW-S	76	3	0.9	3.09		68	60	warmwhite			Tubbing transparent	2	ground
GX138LW-S	77	4	2	3		96	88	warmwhite			Tubbing transparent	3	ground
GX139LW-S	76	1.9	1.2	2.66		77	58	warmwhite			Tubbing transparent	1	ground
GX140LW-S	76	2.4	1.5	3.6		87	70	warmwhite			Tubbing transparent	2	ground
GX141LW-S	77	1.9	0.65	1.8		40	29	warmwhite			Tubbing transparent	1	ground
GX142LW-S	77	2.3	0.76	2.1		58	38	warmwhite			Tubbing transparent	1	ground
GX194L	72	1.2	2.3	1.2		79	82	warm white	xled / stars / flash	pure white	gold	1	ground
GX202LW-S	85	4			1.6	132	35	warm white				9	ground
GX212LW-S	75	1.5	1.5	1.5		24	37	warm white				1	ground
GX213LW-S	83	5,00			5,00	240	457	warm white				29	ground
GX300LW-S	87	4			4	150	84	warm white				27	ground
GX327L	88	1.1			1	25	7.2	pure white	flash	pure white		1	ground
GX327LW	88	1.1			1	25	7.2	warm white	flash	pure white		1	ground
GX863LW-S	87	5.76			3.03	410	210	warm white				47	ground
IPL039W-S	64	2		0.72		35	6.2	pure white / warm white			white	1	pole
IPL113W	43	2		0.9		55	7.8	warm white	slowflash	warm white	gold	1	pole
IPL114W	43	2		0.9		65	9.3	warm white	slowflash	warm white	gold	1	pole
ITL016	58	3.1	3.1			200	25	pure white	flash	pure white	white	2	suspension
ITL016W	58	3.1	3.1			200	25	pure white / warm white	flash	pure white	white	2	suspension
ITL017	58	2.02	2.02			135	16	pure white	stars / flash	pure white	white	1	suspension
ITL019	58	2	2			95	13.2	pure white / warm white	flash	pure white	white	1	suspension
ITL020B	58	0.97	0.85			40	4.2	pure white / blue	flash	pure white	white	1	suspension
ITL020W	58	0.97	0.85			40	4.2	pure white / warm white	flash	pure white	white	1	suspension
ITL021	58	1.25	1.25			55	5.2	pure white			white	1	suspension
ITL022	58	0.97	0.85			30	3.2	pure white			white	1	suspension
ITL022W	58	0.97	0.85			30	3.2	warm white			white	1	suspension
ITL023W-S	49	1		1		12	4	warm white			white	1	transverse
ITL024W-S	49	1		1		12	4	warm white			white	1	transverse
ITL025W-S	49	1		1		10	2	warm white			white	1	transverse
ITL027W-S	64	1		0.67		30	3.2	pure white / warm white			white	1	transverse
ITL044W-S	64	1.42		4.65		115	19.6	warm white			white	2	transverse
ITL046	58	0.82	0.7			30	3.4	pure white			white	1	suspension
ITL062W-S	65	1.5		5		116	22	warm white			gold	2	transverse

Code	Page	Height	Width	Length	Diameter	Power (W)	Weight	Led colour	Animation	Flash color	Bioprint colour	No of elements	Mounting
ITL063W-S	65	1.2		6		210	37	warm white			gold	2	transverse
ITL064W-S	65	1		3.5		114	23	warm white			gold	2	transverse
ITL065W-S	49	1		0.76		20	5	warm white			white	1	transverse
ITL066W-S	49	1		0.7		10	4	warm white			white	1	transverse
ITL067W-S	49	1		0.71		10	4	warm white			white	1	transverse
ITL081W-S	49	1		0.85		4	2	warm white			white	1	transverse
ITL084W	49	0.85		0.7		47	5	warm white			gold	1	transverse
ITL096W	60	1	3			139	21	pure white / warm white	slowflash	pure white	white	1	transverse
ITL099W	64	0.7	4.6			113	23	pure white	slowflash	warm white	gold	2	transverse
ITL113W	42	0.7		4		110	15.6	warm white	slowflash	warm white	gold	2	transverse
ITL114W	42	0.9		4		130	18.6	warm white	slowflash	warm white	gold	2	transverse
ITL115	58	0.5	0.5			16	4	pure white				1	suspension
ITL115W	58	0.5	0.5			16	4	warm white				1	suspension
ITL116W	65	1.18		6		168	27	warm white			gold	2	transverse
ML015R-S	67	1		1		80	10	red				1	wall
ML015RW-S	67	1		1		80	10	warm white				1	wall
ML015W-S	67	1		1		80	10	warm white				1	wall
ML016R-S	67	2		2		440	17.6	red				1	wall
ML016RW-S	67	2		2		440	17.6	warm white				1	wall
ML016W-S	67	2		2		440	17.6	warm white				1	wall
ML017R-S	67	0.8		2		66	11	red				1	wall
ML017RW-S	67	0.8		2		66	11	warm white				1	wall
ML017W-S	67	0.8		2		66	11	warm white				1	wall
ML018R-S	66	4	0.66	3.37		440	183	red				4	wall
ML018RW-S	66	4	0.66	3.37		440	183	warm white				4	wall
ML018W-S	66	4	0.66	3.37		440	183	warm white				4	wall
PL034W-S	43	2.5		1.42		55	20.7	warm white	anim			2	pole
PL035W-S	45	3		1.1		80	11	warm white				1	pole
PL036W-S	45	1.3		1.3		122	17	warm white				1	pole
PL037W-S	45	0.9	1.48			106	9	warm white				1	pole
PL312W	43	1.6		0.9		53	12	warm white	slowflash	warm white	gold	1	pole
PL313W	43	2		1		20	10.8	warm white				1	pole
PL315W	43	0.9		1.05		15	8	warm white				1	pole
SL005W-S	87	5			3.3	100	205	warm white				7	ground
SL012	88	1.3	2.5			25	8	pure white	flash	pure white		1	ground
SL012W	88	1.3	2.5			25	8	warm white	flash	pure white		1	ground
SL013	88	2	3.5			45	9	pure white	flash	pure white		1	ground
SL013W	88	2	3.5			45	9	warm white	flash	pure white		1	ground

Code	Page	Height	Width	Length	Diameter	Power (W)	Weight	Led colour	Animation	Flash color	Bioprint colour	No of elements	Mounting
SL016-S	91	4.55	4.5			65	130	warm white				8	ground
SL017W-S	91	4.8		5.15		310	108	warm white				7	ground
SL019W-S	83	2.75	2.24	3		200	190	warm white			white	5	ground
SL030R	81	4	0.7	6.2		404	325	red				4	ground
SL032	89	1.4	1.65			40	7.6	pure white				1	ground
SL032W	89	1.4	1.65			40	7.6	warm white				1	ground
SL033	89	2.1	2.5			45	8.8	pure white				4	ground
SL033W	89	2.1	2.5			45	8.8	pure white				4	ground
SL034W-S	90	3	4.3			241	137	pure white / warm white				8	ground
SL035W-S	89	2	0.6	2.1		62	46	pure white / warm white	comet			5	ground
SL036W-S	89	2.9	1	1		21	31	warm white	flash	pure white		3	ground
SL037W-S	88	2.9	1	1		45	51	warm white	flash	pure white		3	ground
SLED010W	84	7.5			3.4			warm white	flash	pure white		7	ground
SLED04	53	3			1.17	100	85	pure white				3	ground
SLED05	53	3			1.17	100	85	warm white				3	ground
SND016	55	2.7			0.88	30	25.5	pure white	stars / flash	pure white		5	ground
SND017	55	6.25			2.2	404	183	pure white	stars / flash	pure white		5	ground
SND018	55	2.7			0.88	30	25.5	warm white	stars / flash	pure white		3	ground
SND019	55	6.25			2.2	401	193	warm white	stars / flash	pure white		5	ground
SND02	85	5			2.45	410	190	pure white / warm white	stars		white	4	ground
SND020	55	2.7			0.88	30	25.5	pure white	stars / flash	pure white	frosted blue	3	ground
SND021	54	5.5			2.5	441	259	multicoloured	stars / flash	pure white		32	ground
SND022	52	8			2.7	474	215	warm white	stars / flash / comet			13	ground
SV1000-L	53	10			4.9	952	1000	pure white				25	ground
SV1200-S	50	12			6	389	1479	warm white				45	ground
SV300LW	51	3			1.3	29	50	warm white				2	ground
SV500-L	53	5			2.45	270	283	warm white				4	ground
TGL001R	68	0.3	0.3	0.3		5	1.8	red				1	transverse
TGL001W	68	0.3	0.3	0.3		5	1.8	warm white				1	transverse
TGL002R	68	0.6	0.6	0.6		20	5	red				2	transverse
TGL002W	68	0.6	0.6	0.6		20	5	warm white				2	transverse
TGL003R	68	1	1	1		30	10.4	red				2	transverse
TGL003W	68	1	1	1		30	10.4	warm white				2	transverse
TGL004R	68	0.3	0.2	0.31		5	1.4	red				2	transverse
TGL004W	68	0.3	0.2	0.31		5	1.4	warm white				2	transverse
TGL005R	68	0.6	0.35	0.62		6	4.2	red				2	transverse
TGL005W	68	0.6	0.35	0.62		6	4.2	warm white				2	transverse
TGL006R	68	1	0.55	1.05		8	18	red				2	transverse

Code	Page	Height	Width	Length	Diameter	Power (W)	Weight	Led colour	Animation	Flash color	Bioprint colour	No of elements	Mounting
TGL006W	68	1	0.55	1.05		8	18	warm white				2	transverse
TGL007R	68	0.3	0.2	0.31		5	1.6	red				2	transverse
TGL007W	68	0.3	0.2	0.31		5	1.6	warm white				2	transverse
TGL008R	68	0.6	0.35	0.62		6	13	red				2	transverse
TGL008W	68	0.6	0.35	0.62		6	13	warm white				2	transverse
TGL009R	68	1	0.55	1.05		8	5.2	red				2	transverse
TGL009W	68	1	0.55	1.05		8	5.2	warm white				2	transverse
TGL140W-S	61	7	2.15	2.15		260	43.5	warm white				1	transverse
TGL141W-S	60	2	0.5	2		100	20	warm white				1	transverse
TGL142W-S	60	1	0.25	1		30	9	warm white				1	transverse
TGL150W-S	47	1			1	20	11	warm white				1	transverse
TGL177W-S	81	5			5	1024	201	warm white				15	ground
TGL70LW	69	0.6			0.6	30	4	pure white				1	transverse
TGL70LWW	69	0.6			0.6	30	4	warm white				1	transverse
TGL71LW	69	1			1	75	10.9	pure white				1	transverse
TGL71LWW	69	1			1	75	10.9	warm white				1	transverse
TGL72LW	69	1.6			1.6	165	24.8	pure white				1	transverse
TGL72LWW	69	1.6			1.6	165	24.8	warm white				1	transverse
TL153W	47	1.5		1.58		33	9	warm white				1	transverse
TL154W	47	0.9		0.97		11	5	warm white				1	transverse
TL169R	47	1.5		1.5		30	9	red				1	transverse
TL170R	47	0.8		0.8		15	2.4	red				1	transverse
TL175W-S	47	1.5	1.5			45	18.2	warm white				1	transverse
TL195W-S	47	0.9		1		15	3.8	warm white				1	transverse
TL196W-S	47	1.5		1.58		23	7	warm white				1	transverse
TL199W-S	47	1.1		0.63		8	7	warm white				1	transverse
TL241WG-S	60	1.5		6		90	23	warm white				3	transverse
TL341W	42	1.5		6		110	28	warm white				3	transverse

blachere scandinavia
www.blachere-illumination.com



Finland
Blachère Illumination Finland
Lohikari
Ruoholahdenkatu 24
00180 Helsinki
tel : +358 9 565 7750
email : lohikari@lohikari.fi

Norway/Norge
Blachère Illumination Norwayn EuroSign
Stanseveien 21
0975 Oslo
tel : +47 23 00 85 00
email : salg@eurosign.no

Sweden/Sverige
Blachere Illumination Sweden
Standbergsgatan 51
11251 - Stockholm
tel : +46 707 545 180
email : anders@blachere-illumination.se

Denmark/Danmark
Blachère Illumination Denmark
Stenderupvej 60
6091 Bjert - Danmark
tel : +45 30 26 74 05
email : info@jadagroup.dk



Blachere Illumination S.S.A. - ZI - 84400 - Apt - France
France: +33 (0) 413 068 001 - Export: +33 (0) 413 068 002 - Retail: +33 (0) 413 068 003 - Accueil/Reception: +33 (0) 413 068 004
clients@blachere-illumination.com / sales@blachere-illumination.com

www.blachere-illumination.com